





OLF30

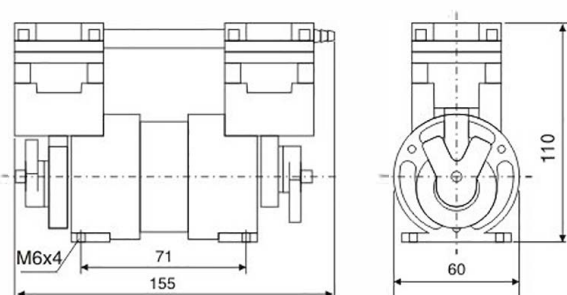

OLF80

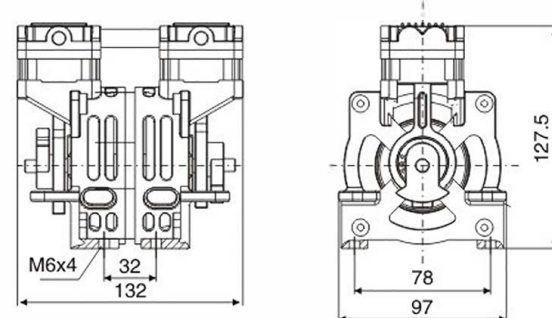

OLF90

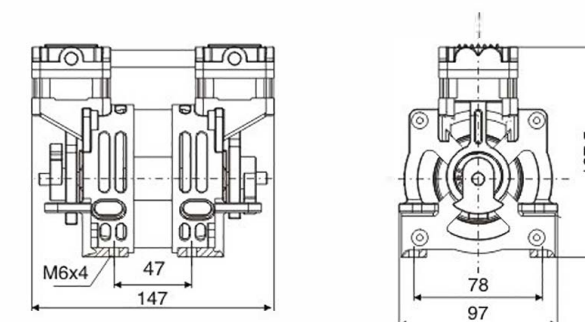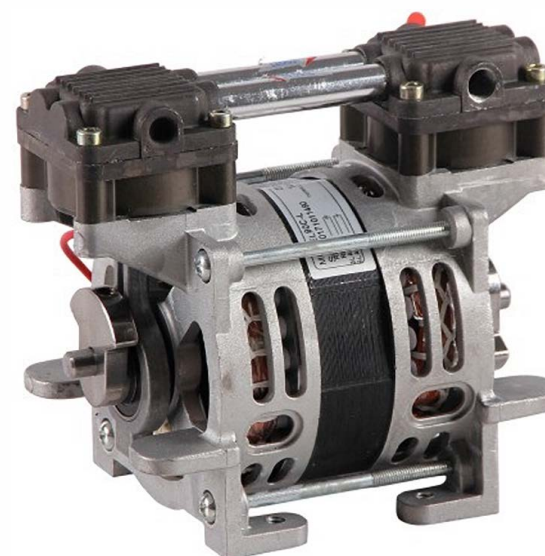

压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	1.0	1.5	2.0	2.5	Contin uous	Intermi ttent	Restart	Min.(°C)	Max.(°C)				
直流DC	OLF30D	17.3	10	3	1	1	2.0	5.0	2.0	-40	40	50	1700	YES	1.1
	OLF80D	25	18	13	7	5	2.0	5.0	2.0	-40	40	100	1800	YES	1.2

真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
直流DC	OLF30Z	17.3	-	-	-	1.0	-700	0	-40	40	27	1700	YES	1.1
	OLF80Z	25	-	-	-	1.5	-745	0	-40	40	80	1800	YES	1.2


压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	1.0	1.5	2.0	2.5	Contin uous	Intermi ttent	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF90D	25	20	18	15	10	2.5	5.0	2.0	0	40	90	1400	YES	2.0
交流 AC.60Hz	OLF90DS	30	25	20	18	15	2.5	5.0	2.0	0	40	90	1400	YES	2.0



真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF90Z	25	-	-	-	1.0	-735	0	0	40	90	1400	YES	2.0
交流 AC.60Hz	OLF90ZS	30	-	-	-	1.5	-735	0	0	40	90	1400	YES	2.0

OLF100

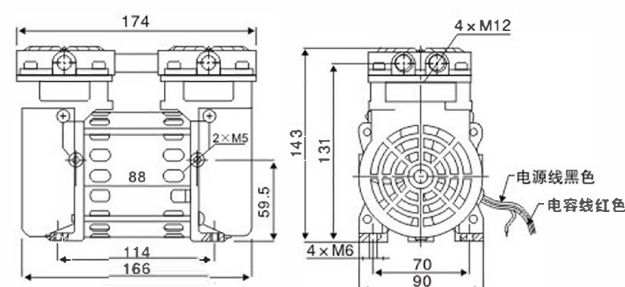

OLF295

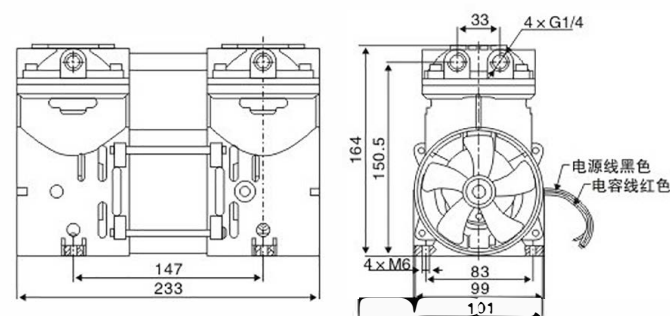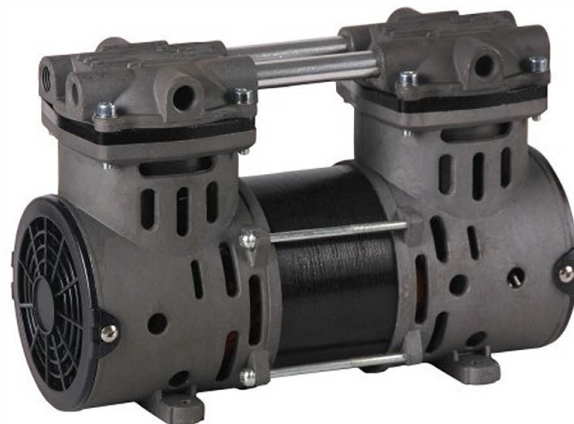


压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	1.0	1.5	2.0	2.5	Contin uous	Intermi tent	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF100D	40	28.3	25	23.3	20	1.4	2.0	0	-5	40	130	1390	YES	3.5
交流 AC.60Hz	OLF100DS	48.3	35	30	28.3	25	1.4	2.0	0	-5	40	145	1690	YES	3.5
直流DC	OLF100D-076	48.3	35	30	28.3	25	2.0	5.0	2.0	-5	40	145	1700	YES	2.8
	OLF295D-096	102	72	50	36	23	7.0	8.0	4.0	-5	40	370	1750	YES	6.4
交流 AC.50Hz	OLF295D	81.7	65	58.3	53.3	48.3	2.0	2.5	0	-5	40	300	1400	YES	6.3
	OLF320D	88.3	68.3	61.7	60	56.7	2.0	2.5	0	-5	40	325	1400	YES	6.3
交流 AC.60Hz	OLF295DS	85	73.3	70	65	60	2.0	2.5	0	-5	40	350	1690	YES	6.3
	OLF320DS	98.3	80	75	70	63.3	2.0	2.5	0	-5	40	365	1650	YES	6.3

真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF100Z	40	25.0	14.2	7.0	2.0	-745	0	-5	40	95	1450	YES	3.5
交流 AC.60Hz	OLF100ZS	48.3	31.7	14.7	7.5	2.2	-745	0	-5	40	100	1750	YES	3.5
直流DC	OLF100D-076	48.3	31.7	14.7	7.5	2.2	-745	0	-5	40	100	1800	YES	2.8
	OLF295D-096	102	53	29	16	9.0	-745	0	-5	40	210	1800	YES	6.4
交流 AC.50Hz	OLF295Z	81.7	55.0	36.7	22.0	7.7	-745	0	-5	40	210	1450	YES	6.3
	OLF320Z	88.3	56.0	38.0	23.0	8.5	-745	0	-5	40	230	1450	YES	6.3
交流 AC.60Hz	OLF295ZS	85	56.0	35.0	23.0	7.8	-745	0	-5	40	235	1750	YES	6.3
	OLF320ZS	98.3	65.5	46.0	26.0	8.8	-745	0	-5	40	255	1750	YES	6.3

OLF248 / OLF370 / OLF400

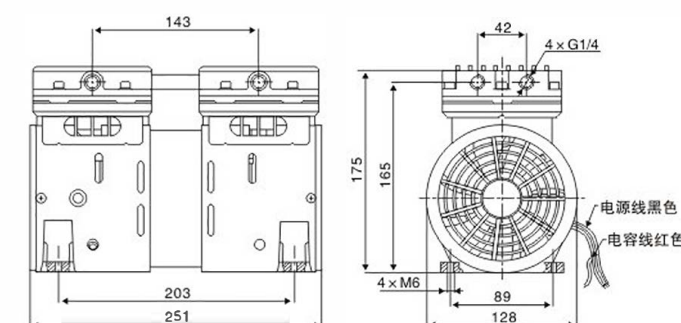


压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	1.0	1.5	2.0	2.5	Contin uous	Intermi tent	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF400D	118	96.7	91.7	86.7	81.7	2.0	2.5	0	-5	40	480	1380	YES	8.5
	OLF370D	102	80	75	70	63.3	2.0	2.5	0	-5	40	380	1400	YES	7.5
	OLF248D	80	68.3	61.7	60	56.7	2.0	2.5	0	-5	40	350	1400	YES	7.5
交流 AC.60Hz	OLF400DS	137	120	113	102	98.3	2.0	2.5	0	-5	40	560	1650	YES	8.5
	OLF370DS	118	96.7	91.7	86.7	81.7	2.0	2.5	0	-5	40	425	1680	YES	7.5
	OLF248DS	102	80	75	70	63.3	2.0	2.5	0	-5	40	380	1700	YES	7.5

真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF400Z	118.0	81.7	59.0	34.0	9.7	-745	0	-5	40	330	1450	YES	8.5
	OLF370Z	102.0	68.3	46.0	26.0	7.8	-745	0	-5	40	275	1450	YES	7.5
	OLF248Z	80.0	53.3	35.0	21.3	7.8	-745	0	-5	40	245	1450	YES	7.5
交流 AC.60Hz	OLF400ZS	137.0	85.0	60.7	35.8	10.0	-745	0	-5	40	400	1750	YES	8.5
	OLF370ZS	118.0	81.7	59.0	34.0	9.7	-745	0	-5	40	300	1750	YES	7.5
	OLF248ZS	102.0	68.3	46.0	26.0	7.8	-745	0	-5	40	275	1750	YES	7.5

OLF850

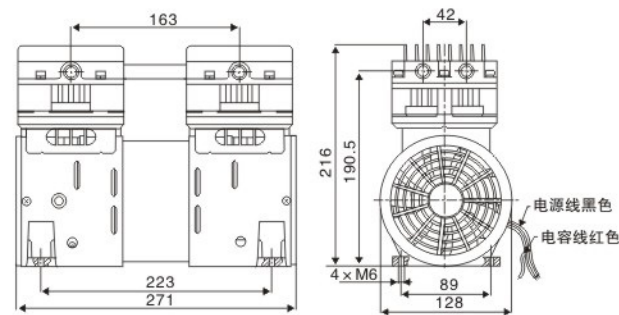

压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	1.0	1.5	2.0	2.5	Contin uous	Intermi ttent	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF850D	150	120	118	116	110	2.0	2.5	0	-5	40	850	1400	YES	10
交流 AC,60Hz	OLF850DS	160	130	128	126	120	2.0	2.5	0	-5	40	900	1600	YES	10

真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF90Z	150	110	90	35	10	-745	0	-5	40	600	1400	YES	10
交流 AC,60Hz	OLF90ZS	160	120	80	45	13	-745	0	-5	40	650	1600	YES	10



美甲喷绘
Nail art



新能源
new energy



汽车行业
Automobile industry



牙科
Dentistry




OLF300

OLF400

OLF550

OLF750

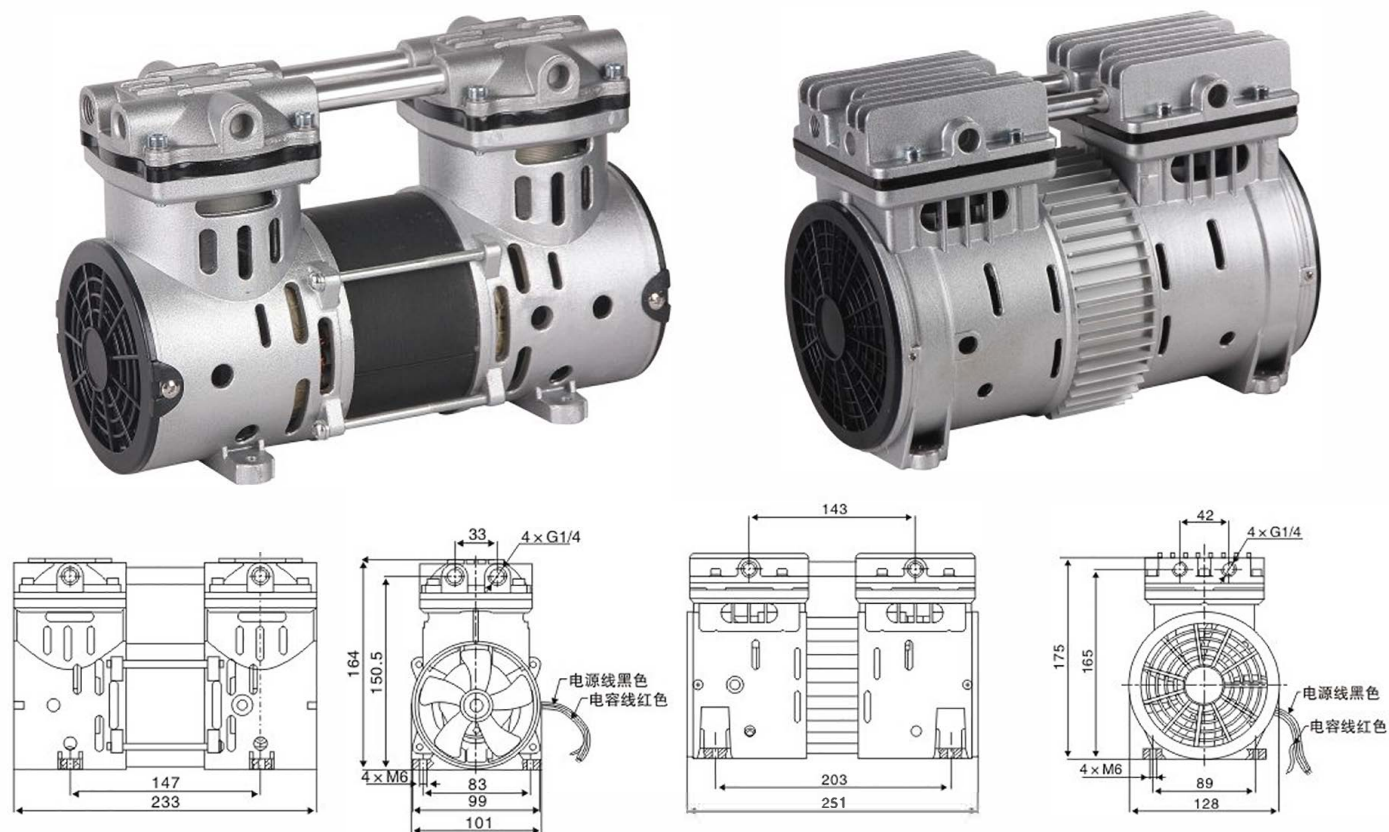

压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM @ BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	2.0	4.0	6.0	8.0	Contin- uous	Intermi- tent	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF300G	70	35	30	25	20	7.0	8.0	1.0	0	40	360	1400	YES	6.3
交流 AC.60Hz	OLF300GS	80	40	35	30	25	7.0	8.0	1.0	0	40	400	1600	YES	6.3
直流 DC	OLF300G-10	89	80	75	70	63	7.0	8.0	4.0	0	40	300	1800	YES	6
	OLF400-10	100	90	85	80	73	7.0	8.0	1.0	0	40	400	1800	YES	7
交流 AC.50Hz	OLF400G	80	60	55	40	35	7.0	8.0	1.0	0	40	500	1400	YES	7
交流 AC.60Hz	OLF400GS	90	70	65	55	45	7.0	8.0	1.0	0	40	550	1600	YES	7

0

真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM @ BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi- mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF300G	70	35	20	10	5	-745	0	-5	40	210	1400	YES	3.5
交流 AC.60Hz	OLF300GS	80	40	25	12	6	-745	0	-5	40	100	1600	YES	3.5
直流 DC	OLF300G-10	89	80	35	17	8	-745	0	-5	40	120	1800	YES	3.5
	OLF400-10	100	90	52	32	10	-745	0	-5	40	130	1800	YES	6.5
交流 AC.50Hz	OLF400G	80	60	35	20	9.5	-745	0	-5	40	300	1400	YES	8.5
交流 AC.60Hz	OLF400GS	90	70	55	30	10	-745	0	-5	40	300	1600	YES	6.5


压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM @ BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	2.0	4.0	6.0	8.0	Contin- uous	Intermi- tent	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF550G	102	70	55	46.7	35	7.0	8.0	1.0	-5	40	560	1380	YES	9.0
交流 AC.60Hz	OLF550GS	102	70	55	46.7	35	7.0	8.0	1.0	-5	40	560	1680	YES	9.0
直流 DC	OLF550G-106	102	70	55	46.7	35	7.0	8.0	4.0	-5	40	520	1750	YES	10.0
交流 AC.50Hz	OLF750G	135	96.7	76.7	68.3	53.3	7.0	8.0	1.0	-5	40	780	1380	YES	10.0
交流 AC.60Hz	OLF750GS	135	96.7	76.7	68.3	53.3	7.0	8.0	1.0	-5	40	780	1680	YES	10.0


真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM @ BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi- mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC.50Hz	OLF550Z	51.7	28.4	15.5	9.5	5.0	-745	0	-5	40	320	1450	YES	9.0
交流 AC.60Hz	OLF550ZS	51.7	28.4	15.5	9.5	5.0	-745	0	-5	40	320	1750	YES	9.0
直流 DC	OLF550Z-106	102.0	56.0	30.0	17.0	9.5	-745	0	-5	40	370	1750	YES	10.0
交流 AC.50Hz	OLF750Z	68.3	37.5	20.6	11.4	6.0	-745	0	-5	40	430	1450	YES	10.0
交流 AC.60Hz	OLF750ZS	68.3	37.5	20.6	11.4	6.0	-745	0	-5	40	430	1750	YES	10.0

OLF1100G / OLF1500G

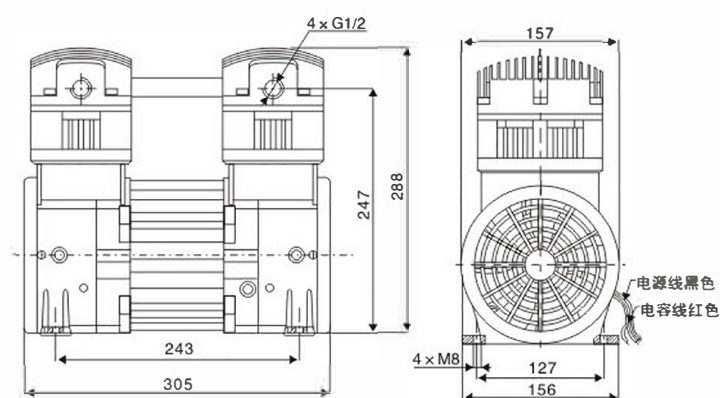

OLF1100GD / OLF1500GD

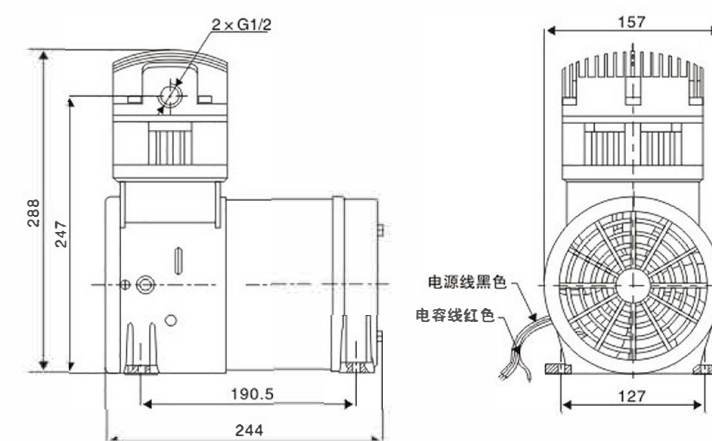

压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	2.0	4.0	6.0	8.0	Contin- uous	Intermi- tent	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF1100G	200	160	137	125	103	8.0	9.0	1.0	-5	40	1100	1380	YES	17.0
交流 AC,60Hz	OLF1100GS	200	160	137	125	103	8.0	9.0	1.0	-5	40	1100	1680	YES	17.0
交流 AC,50Hz	OLF1500G	280	223	192	175	145	8.0	9.0	4.0	-5	40	1350	1380	YES	17.5
交流 AC,60Hz	OLF1500GS	280	223	192	175	145	8.0	9.0	1.0	-5	40	1350	1650	YES	17.5

压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	2.0	4.0	6.0	8.0	Contin- uous	Intermi- tent	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF1100GD	100	80	68	63	52	8.0	9.0	1.0	-5	40	820	1380	YES	12.0
	OLF1500GD	140	112	95	86.7	71.7	8.0	9.0	1.0	-5	40	950	1380	YES	12.5
交流 AC,60Hz	OLF1100GDS	122	97	83	75	63	8.0	9.0	1.0	-5	40	850	1680	YES	12.0
	OLF1500GDS	169	135	115	105	87	8.0	9.0	1.0	-5	40	1000	1650	YES	12.5


两级真空 TWO-GRADE VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi- mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF1100Z	100	55	30.0	16.6	9.5	-745	0	-5	40	600	1450	YES	17.0
交流 AC,60Hz	OLF1100ZS	100	55	30.0	16.6	9.5	-745	0	-5	40	600	1750	YES	17.0
交流 AC,50Hz	OLF1500Z	140	77	42.3	23.3	12.8	-745	0	-5	40	750	1450	YES	17.5
交流 AC,60Hz	OLF1500ZS	140	77	42.3	23.3	12.8	-745	0	-5	40	750	1720	YES	17.5


真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi- mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF1100ZD	100	55	30.0	16.6	9.5	-745	0	-5	40	550	1450	YES	12.0
	OLF1500ZD	140	77	42.3	23.3	12.8	-745	0	-5	40	650	1450	YES	12.5
交流 AC,60Hz	OLF1100ZDS	122	67	37.0	20.3	11.0	-745	0	-5	40	600	1750	YES	12.0
	OLF1500ZDS	169	93	51.0	28.0	15.5	-745	0	-5	40	700	1720	YES	12.5

OLF550GD

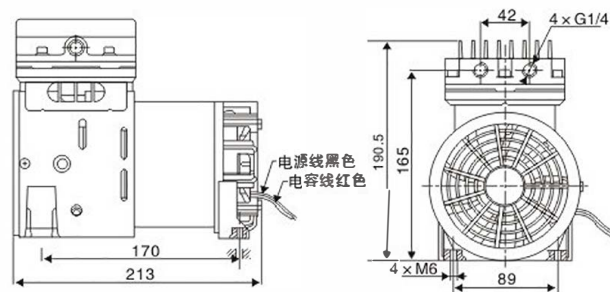

OLF750GD

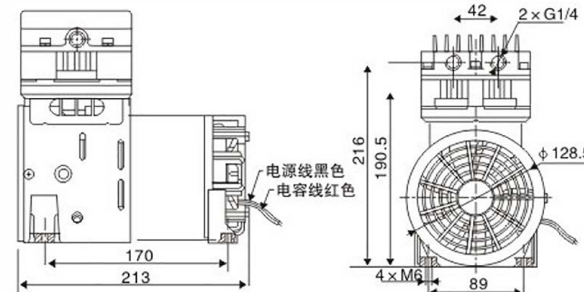

压力 PRESSURE

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	流量性能 COMPRESSOR PERFORMANCE (LPM@BAR)					最大压力 MAXIMUM PRESSURE (BAR)			环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	2.0	4.0	6.0	8.0	Contin- uous	Intermi- tent	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF550GD	51.7	35	28.3	23.3	18.3	7.0	8.0	1.0	-5	40	450	1400	YES	7.0
交流 AC,60Hz	OLF550GDS	63	42.5	34.5	28	22.5	7.0	8.0	1.0	-5	40	500	1680	YES	7.0
交流 AC,50Hz	OLF750GD	68.3	48.3	38.3	35	26.7	7.0	8.0	1.0	-5	40	500	1380	YES	8.5
交流 AC,60Hz	OLF750GDS	83	58	46	43	32	7.0	8.0	1.0	-5	40	560	1680	YES	8.5

真空 VACUUM

电源 ELECTRICAL SOURCE	型号 MODEL NUMBERS	真空性能 VACUUM PERFORMANCE (LPM@BAR)					真空 VACUUM (BAR)		环境温度 AMBIENT AIR TEMP		输入功率 POWER (Watts)	转速 SPEED (RPM)	热保护器 THERMAL PROTECTOR	净重 NET WEIGHT (KG)
		0	-200	-400	-600	-800	Maxi- mum(mmHg)	Restart	Min.(°C)	Max.(°C)				
交流 AC,50Hz	OLF550ZD	51.7	28.4	15.5	9.5	5.0	-910	0	-5	40	300	1450	YES	7.0
交流 AC,60Hz	OLF550ZDS	63.0	34.5	19.0	10.5	5.8	-910	0	-5	40	350	1750	YES	7.0
交流 AC,50Hz	OLF750ZD	68.3	37.5	20.6	11.4	6.0	-910	0	-5	40	350	1450	YES	8.5
交流 AC,60Hz	OLF750ZDS	83.0	45.5	25.0	13.8	7.6	-910	0	-5	40	400	1750	YES	8.5

RS100-5

以下系列产品储气罐采用不锈钢和铝材料，防止输出气体受污染，能够有效保持牙科治疗等设备的正常使用；还可延长储气罐使用寿命。

The following series of gas storage tanks are made of stainless steel and aluminum to prevent contamination of the output gas, to effectively maintain the normal use of equipment such as dental treatment, and to extend the life of the gas tank.



铁制储气罐排出的水中经显微镜下的细小铁屑形状
The water discharged from the iron storage tank is in the shape of fine iron filings under the microscope.



不锈钢和铝材料储气罐排出的水
Water discharged from stainless steel and aluminum material storage tanks.



铁制储气罐排出的水
Water discharged from iron storage tanks.



型号 MODEL NUMBERS	电源 ELECTRICAL SOURCE	排气量 EXHAUST VOLUME (L/min)	压力 PRESSURE (R.P.M)	输入功率 POWER (Watts)	转速 SPEED (RPM)	噪音 NOISE (dB)	净重 NET WEIGHT (KG)	
							不锈钢 Stainless steel	铝 Aluminum
RS100-5	220/50	35	0.5	160	1400	≤65	8	5

RS300-6



型号 MODEL NUMBERS	电源 ELECTRICAL SOURCE	排气量 EXHAUST VOLUME (L/min)	压力 PRESSURE (R.P.M)	输入功率 POWER (Watts)	转速 SPEED (RPM)	噪音 NOISE (dB)	净重 NET WEIGHT (KG)	
							不锈钢 Stainless steel	铝 Aluminum
RS300-6	220/50	45	0.6	300	1400	≤65	11	8

RS800-24
RS800Z-24



型号 MODEL NUMBERS	电源 ELECTRICAL SOURCE	排气量 EXHAUST VOLUME (L/min)	压力 PRESSURE (R.P.M)	输入功率 POWER (Watts)	转速 SPEED (RPM)	噪音 NOISE (dB)	净重 NET WEIGHT (KG)
RS800-24	220/50	176	0.7	800	1400	≤70	21

型号 MODEL NUMBERS	电源 ELECTRICAL SOURCE	吸气量 INSPIRATORY VOLUME (L/min)	真空 VACUUM mum(mmHg)	输入功率 POWER (Watts)	转速 SPEED (RPM)	噪音 NOISE (dB)	净重 NET WEIGHT (KG)
RS800Z-24	220/50	180	-745	600	1400	≤60	21

RS1500-40
RS1500Z-40



型号 MODEL NUMBERS	电源 ELECTRICAL SOURCE	排气量 EXHAUST VOLUME (L/min)	压力 PRESSURE (R.P.M)	输入功率 POWER (Watts)	转速 SPEED (RPM)	噪音 NOISE (dB)	净重 NET WEIGHT (KG)
RS1500-24	220/50	240	0.8	1500	1400	≤70	30

型号 MODEL NUMBERS	电源 ELECTRICAL SOURCE	吸气量 INSPIRATORY VOLUME (L/min)	真空 VACUUM mum(mmHg)	输入功率 POWER (Watts)	转速 SPEED (RPM)	噪音 NOISE (dB)	净重 NET WEIGHT (KG)
RS800Z-24	220/50	240	-745	900	1400	≤60	30

**SALES 销售网络
NETWORK**

