

NSR型 罗茨风机性能表

QS:进风状态风量 (m³/min)
La:所需动力 (kw)

0.55kw 0.75kw 1.1kw 1.5kw 2.2kw 3kw 4kw 5.5kw 7.5kw 11kw

型式 Type	口径 Bore	转速 rpm	排出压力 (kgf/cm²)																					
			0.10		0.15		0.2		0.25		0.3		0.35		0.4		0.45		0.5		0.55		0.6	
			9.8kPa		14.7kPa		19.6kPa		24.5kPa		29.4kPa		34.3kPa		39.2kPa		44.1kPa		49kPa		53.9kPa		58.8kPa	
			Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La
NSR 40	★ 40A	1250	0.44	0.30	0.43	0.35	0.42	0.39	0.41	0.42	0.40	0.45	0.39	0.51	0.38	0.59	0.37	0.67	0.36	0.72	0.35	0.80	0.34	0.88
		1390	0.50	0.36	0.49	0.40	0.47	0.44	0.46	0.47	0.45	0.50	0.44	0.56	0.43	0.62	0.42	0.71	0.41	0.73	0.40	0.85	0.36	0.93
		1480	0.54	0.42	0.53	0.47	0.51	0.50	0.50	0.52	0.49	0.59	0.48	0.63	0.47	0.69	0.46	0.75	0.45	0.82	0.44	0.92	0.42	0.99
		1800	0.64	0.50	0.62	0.55	0.63	0.58	0.62	0.60	0.61	0.67	0.60	0.71	0.59	0.77	0.58	0.83	0.57	0.91	0.56	0.98	0.55	1.10
		2100	0.72	0.58	0.70	0.62	0.69	0.65	0.68	0.68	0.67	0.72	0.66	0.78	0.65	0.85	0.64	0.90	0.63	0.97	0.62	1.12	0.61	1.22
		2400	0.85	0.64	0.84	0.68	0.83	0.72	0.82	0.75	0.80	0.79	0.79	0.83	0.78	0.91	0.77	0.98	0.76	1.09	0.75	1.20	0.73	1.32
NSR 50	★ 50A	1100	1.22	0.30	1.14	0.14	1.11	0.50	1.03	0.67	0.98	0.79	0.92	0.91	0.89	1.05	0.83	1.16	0.75	1.34	0.70	1.54	0.65	1.77
		1230	1.40	0.39	1.30	0.50	1.26	0.61	1.18	0.79	1.12	0.95	1.07	1.05	1.03	1.23	0.98	1.37	0.92	1.47	0.88	1.65	0.83	1.83
		1350	1.53	0.44	1.45	0.61	1.41	0.75	1.32	0.85	1.29	1.05	1.25	1.17	1.17	1.35	1.15	1.53	1.06	1.63	1.03	1.80	0.99	2.01
		1430	1.66	0.50	1.55	0.64	1.50	0.84	1.43	0.96	1.38	1.14	1.34	1.30	1.22	1.43	1.21	1.63	1.17	1.76	1.12	1.91	1.09	2.11
		1530	1.74	0.55	1.66	0.75	1.61	0.91	1.53	1.07	1.50	1.35	1.45	1.41	1.39	1.68	1.33	1.74	1.32	2.05	1.28	2.12	1.25	2.35
		1640	1.89	0.64	1.79	0.81	1.74	1.02	1.71	1.15	1.65	1.46	1.61	1.54	1.56	1.82	1.52	1.88	1.48	2.23	1.43	2.28	1.40	2.60
		1730	2.00	0.72	1.91	0.95	1.86	1.14	1.82	1.25	1.78	1.55	1.73	1.68	1.68	1.97	1.64	2.03	1.60	2.35	1.57	2.47	1.53	2.73
		1840	2.13	0.80	2.11	1.03	2.05	1.23	1.99	1.39	1.93	1.68	1.87	1.79	1.82	2.10	1.78	2.25	1.75	2.56	1.72	2.65	1.68	2.94
		1950	2.20	0.89	2.27	1.14	2.21	1.35	2.15	1.51	2.10	1.83	2.04	1.94	1.96	2.27	1.93	2.41	1.90	2.71	1.86	2.81	1.82	3.15
		2120	2.58	1.06	2.52	1.28	2.46	1.50	2.39	1.73	2.32	2.05	2.26	2.17	2.20	2.53	2.18	2.68	2.15	3.05	2.11	3.15	2.07	3.54
2300	2.75	1.13	2.71	1.38	2.67	1.63	2.62	1.87	2.58	2.31	2.53	2.35	2.48	2.85	2.43	2.90	2.40	3.33	2.38	3.41	2.35	3.83		
NSR 65	★ 65A	1110	1.68	0.38	1.55	0.63	1.50	0.82	1.42	1.02	1.34	1.18	1.23	1.37	1.15	1.54	1.14	1.74	1.05	1.84	0.99	2.02	0.94	2.25
		1240	1.94	0.48	1.84	0.72	1.75	0.94	1.63	1.14	1.55	1.35	1.52	1.55	1.45	1.76	1.35	1.94	1.34	2.12	1.25	2.32	1.19	2.58
		1360	2.16	0.56	2.08	0.83	1.95	1.06	1.85	1.26	1.80	1.50	1.77	1.73	1.70	1.96	1.64	2.20	1.55	2.33	1.51	2.55	1.45	2.80
		1440	2.31	0.63	2.24	0.85	2.16	1.14	2.05	1.36	2.02	1.62	1.95	1.83	1.88	2.12	1.82	2.34	1.76	2.56	1.70	2.75	1.65	3.02
		1530	2.44	0.70	2.35	0.98	2.28	1.22	2.23	1.47	2.15	1.70	2.09	1.95	2.04	2.27	1.97	2.52	1.92	2.74	1.86	2.95	1.80	3.22
		1640	2.66	0.80	2.59	1.05	2.51	1.35	2.44	1.62	2.38	1.85	2.32	2.15	2.62	2.48	2.20	2.75	2.14	2.93	2.08	3.24	2.03	3.44
		1740	2.88	0.89	2.78	1.20	2.71	1.45	2.64	1.76	2.58	2.02	2.53	2.32	2.48	2.66	2.41	2.96	2.34	3.18	2.28	3.47	2.23	3.72
		1820	3.00	0.96	3.01	1.25	2.92	1.54	2.83	1.88	2.75	2.15	2.68	2.44	2.62	2.75	2.56	3.12	2.50	3.35	2.44	3.65	2.38	3.93
		1940	3.23	1.11	3.15	1.42	3.07	1.73	3.04	2.05	2.98	2.33	2.92	2.68	2.85	3.04	2.79	3.38	2.74	3.57	2.68	3.92	2.63	4.22
		2130	3.66	1.33	3.57	1.63	3.48	1.93	3.42	2.32	3.35	2.67	3.30	3.03	3.25	3.38	3.17	3.74	3.11	4.02	3.06	4.32	3.02	4.64
2300	3.8	1.42	3.72	1.78	3.64	2.14	3.57	2.52	3.50	2.92	3.43	3.31	3.35	3.85	3.30	4.23	3.25	4.45	3.20	4.92	3.15	5.35		
NSR 80	★ 80A	1140	3.09	1.04	3.02	1.34	2.92	1.62	2.82	1.95	2.75	2.12	2.68	2.45	2.59	2.67	2.52	3.02	2.45	3.25	2.38	3.45	2.34	3.76
		1230	3.37	1.14	3.25	1.44	3.15	1.75	3.08	2.04	3.04	2.33	2.95	2.63	2.88	2.96	2.80	3.25	2.74	3.55	2.65	3.83	2.60	4.13
		1300	3.59	1.22	3.52	1.55	3.42	1.86	3.35	2.23	3.28	2.53	3.22	2.85	3.14	3.16	3.05	3.47	2.98	3.75	2.92	4.07	2.86	4.43
		1360	3.77	1.29	3.65	1.65	3.55	1.97	3.50	2.35	3.44	2.62	3.35	2.97	3.30	3.33	3.20	3.65	3.14	3.95	3.07	4.32	3.01	4.67
		1440	4.06	1.40	3.90	1.80	3.82	2.12	3.71	2.53	3.58	3.11	3.50	3.22	3.42	3.80	3.34	3.91	3.27	4.09	3.20	4.65	3.14	5.35
		1560	4.38	1.52	4.19	1.95	4.11	2.34	4.03	2.76	3.95	3.38	3.88	3.46	3.81	4.15	3.73	4.41	3.65	4.97	3.58	5.25	3.52	5.77
		1650	4.66	1.62	4.55	2.13	4.45	2.52	4.43	2.94	4.25	3.53	4.19	3.75	4.14	4.46	4.04	4.74	3.91	5.32	3.89	5.62	3.84	6.13
		1730	4.90	1.77	4.80	2.25	4.75	2.66	4.69	3.05	4.53	3.74	4.45	3.94	4.37	4.65	4.29	4.82	4.22	5.55	4.15	5.72	4.07	6.45
		1820	5.22	1.88	5.12	2.35	5.02	2.82	4.96	3.25	4.82	3.95	4.74	4.13	4.66	4.95	4.58	5.06	4.51	5.85	4.43	6.04	4.35	6.84
		1900	5.51	2.11	5.38	2.52	5.25	2.93	5.17	3.46	5.13	4.14	5.04	4.33	4.93	5.15	4.87	5.35	4.77	6.14	4.70	6.35	4.63	7.42
2100	6.13	2.35	6.04	2.80	5.95	3.25	5.86	3.80	5.78	4.65	5.71	4.79	5.63	5.87	5.54	5.91	5.46	7.12	5.39	7.01	5.33	7.95		
2300	6.21	2.55	6.12	3.08	6.03	3.61	5.94	4.54	5.85	4.85	5.79	5.24	5.74	6.17	5.69	6.70	5.64	7.53	5.59	7.68	5.55	8.15		

NSR型 罗茨风机性能表

QS:进风状态风量 (m³/min)
La:所需动力 (kw)2.2kw 3kw 4kw 5.5kw 7.5kw 11kw 15kw 18.5kw 22kw 30kw
37kw 45kw 55kw

型式 Type	口径 Bore	转速 rpm	排出压力 (kgf/cm ²)																						
			0.10		0.15		0.2		0.25		0.3		0.35		0.4		0.45		0.5		0.55		0.6		
			9.8kPa		14.7kPa		19.6kPa		24.5kPa		29.4kPa		34.3kPa		39.2kPa		44.1kPa		49kPa		53.9kPa		58.8kPa		
			Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	
NSR 100	100A	★	1060	4.57	1.35	4.42	1.83	4.26	2.25	4.07	2.72	3.93	3.12	3.84	3.55	3.72	4.02	3.57	4.46	3.46	4.97	3.35	5.42	3.25	5.85
		1140	4.98	1.53	4.82	2.03	4.67	2.44	4.52	2.94	4.38	3.43	4.25	3.93	4.14	4.35	4.03	4.86	3.92	5.35	3.83	5.85	3.73	6.35	
		1220	5.36	1.69	5.15	2.22	5.01	2.72	4.87	3.23	4.75	3.73	4.63	4.22	4.55	4.74	4.44	5.27	4.35	5.78	4.25	6.35	4.15	6.92	
		1310	5.75	1.88	5.60	2.43	5.46	2.94	5.34	3.52	5.15	4.03	5.05	4.63	4.93	5.16	4.86	5.77	4.73	6.33	4.66	6.95	4.53	7.43	
		1460	6.52	2.18	6.35	2.75	6.27	3.42	6.13	3.95	6.02	4.64	5.87	5.22	5.75	5.85	5.66	6.54	5.56	7.13	5.45	7.76	5.36	8.43	
		1540	6.91	2.40	6.79	3.04	6.63	3.66	6.55	4.32	6.42	4.95	6.30	5.65	6.17	6.32	6.07	6.97	5.97	7.64	5.89	8.35	5.78	9.02	
		1680	7.63	2.78	7.47	3.45	7.39	4.15	7.26	4.92	7.15	5.64	7.04	6.33	6.90	7.10	6.84	7.85	6.71	8.53	6.65	9.32	6.53	10.05	
		1780	8.02	3.08	7.94	3.83	7.86	4.58	7.75	5.35	7.64	6.13	7.54	6.84	7.44	7.65	7.34	8.45	7.25	9.13	7.16	9.95	7.04	10.73	
		1880	8.51	3.35	8.43	4.15	8.35	4.95	8.23	5.77	8.13	6.57	8.03	7.35	7.93	8.16	7.88	9.03	7.75	9.83	7.65	10.64	7.62	11.45	
		1980	9.01	3.54	8.94	4.44	8.87	5.34	8.73	6.15	8.67	7.03	8.52	7.92	8.44	8.73	8.39	9.65	8.26	10.42	8.22	11.32	8.15	12.15	
		2100	9.62	4.89	9.53	5.50	9.44	6.11	9.35	6.79	9.25	7.55	9.16	8.40	9.07	9.35	8.98	10.23	8.88	11.12	8.79	12.00	8.73	12.95	
		2200	10.22	5.47	10.13	5.86	10.04	6.25	9.94	7.24	9.83	8.05	9.74	8.94	9.64	9.94	9.55	10.71	9.45	11.75	9.35	12.57	9.25	13.60	
NSR 125	125A	★	980	6.50	1.65	6.32	2.25	6.13	2.83	6.03	3.42	5.93	4.12	5.80	4.73	5.73	5.42	5.62	6.13	5.58	6.72	5.45	7.22	5.35	8.03
		1050	6.95	1.90	6.75	2.53	6.65	3.13	6.52	3.83	6.45	4.55	6.32	5.22	6.20	5.93	6.13	6.63	6.05	7.32	5.93	7.93	5.83	8.73	
		1200	8.00	2.50	7.82	3.22	7.67	3.95	7.53	4.72	7.43	5.52	7.32	6.25	7.23	7.13	7.12	7.92	7.02	8.63	6.95	9.43	6.85	10.23	
		1310	8.75	2.90	8.53	3.63	8.42	4.53	8.25	5.33	8.17	6.23	8.07	7.03	8.02	7.92	7.93	8.83	7.84	9.62	7.76	10.03	7.66	11.42	
		1390	9.30	3.20	9.12	4.02	8.93	4.92	8.85	5.82	8.72	6.72	8.65	7.62	8.52	8.52	8.42	9.42	8.35	10.33	8.25	11.27	8.22	12.23	
		1460	9.72	3.45	9.48	4.23	9.33	5.22	9.23	6.13	9.13	7.13	9.03	8.03	8.93	9.02	8.82	9.93	8.75	10.92	8.73	11.82	8.63	12.83	
		1530	10.27	3.80	10.09	4.72	9.92	5.63	9.82	6.63	9.72	7.62	9.62	8.62	9.52	9.62	9.43	10.62	9.35	11.63	9.23	12.63	9.13	13.62	
		1630	10.96	4.30	10.73	5.23	10.55	6.23	10.45	7.23	10.35	8.33	10.25	9.33	10.15	10.33	10.05	11.33	10.03	12.43	9.95	13.53	9.83	14.62	
		1750	11.69	4.71	11.52	5.82	11.35	6.93	11.27	7.93	11.15	9.15	11.07	10.22	10.97	11.24	10.93	12.35	10.85	13.35	10.73	14.72	10.64	15.82	
		1850	12.39	5.19	12.23	6.36	12.07	7.53	11.95	8.55	11.85	9.85	11.72	10.92	11.63	12.04	11.55	13.15	11.52	14.22	11.45	15.62	11.33	16.83	
		2000	13.39	7.17	13.22	8.07	13.05	8.97	12.91	9.96	12.83	11.07	12.71	12.26	12.64	13.62	12.58	14.96	12.53	16.23	12.44	17.42	12.35	18.74	
		NSR 150	150A	★	810	12.00	3.84	11.74	5.03	11.52	6.23	11.33	7.32	11.13	8.52	11.02	9.62	10.84	10.82	10.74	11.97	10.06	13.22	10.54	14.42
860	12.80			4.40	12.64	5.63	12.43	6.88	12.23	8.03	12.05	9.32	11.84	10.47	11.73	11.73	11.63	1303	11.56	14.23	11.42	15.53	11.25	16.82	
970	14.70			5.58	14.52	7.02	14.32	8.33	14.13	9.63	13.93	11.07	13.72	12.43	13.82	13.82	13.62	15.23	13.52	16.62	13.33	18.03	13.25	19.43	
1110	17.08			7.00	16.92	8.62	16.73	10.17	16.54	11.72	16.35	13.12	16.23	14.82	16.17	16.53	16.07	18.03	15.97	19.63	15.82	21.23	15.72	22.82	
1180	18.25			7.80	18.13	9.43	17.94	11.12	17.75	12.73	17.57	14.43	17.45	16.03	17.35	17.83	17.25	19.4	17.15	21.13	17.05	22.82	16.95	24.43	
1240	19.27			8.45	19.12	10.21	18.93	11.92	18.75	13.62	18.65	15.42	18.55	17.05	18.45	18.93	18.35	20.7	18.25	22.43	18.15	24.23	18.05	25.83	
1400	22.00			10.20	21.85	12.12	21.72	14.03	21.53	15.93	21.42	17.92	21.32	19.92	21.23	21.92	21.17	23.83	21.07	25.83	20.95	27.93	20.85	29.72	
1470	23.93			11.65	23.04	13.38	22.87	15.41	22.77	17.43	22.65	19.51	22.56	21.59	22.48	23.82	23.39	25.84	22.30	27.97	22.15	30.20	22.09	32.33	
1620	25.42			13.40	25.32	15.62	25.13	18.02	25.02	20.42	24.84	22.62	24.74	25.03	24.66	27.43	24.55	29.63	24.45	32.07	24.32	34.42	24.25	36.93	
1730	27.15			15.04	26.94	17.63	26.73	20.22	26.63	22.92	26.48	25.32	26.33	27.92	26.29	30.42	26.15	33.03	26.05	35.53	25.95	38.02	25.85	40.82	
1900	29.61			20.57	29.48	22.53	29.35	24.49	29.24	26.62	29.15	28.94	29.03	31.76	28.96	34.54	28.84	37.48	28.73	40.32	28.63	42.66	28.54	45.14	
NSR 175	150A			★	970	21.87	7.20	22.20	10.19	22.13	11.25	21.63	13.35	21.05	15.46	20.85	17.57	20.53	19.65	20.21	21.75	20.12	23.87	19.83	26.03
		1110	25.43	8.91	26.54	11.94	26.33	13.14	25.83	15.53	26.04	17.93	25.24	20.33	24.83	22.73	24.55	25.10	24.23	27.53	24.07	29.93	23.95	32.33	
		1180	27.20	9.87	28.50	12.54	28.35	13.84	27.96	16.35	27.55	18.95	27.17	21.47	26.83	24.07	26.57	26.63	26.34	29.15	26.15	31.74	25.95	34.26	
		1240	28.73	10.65	30.10	13.43	29.94	14.75	29.53	17.47	29.15	20.16	28.85	22.85	28.55	25.54	28.27	28.24	28.05	30.93	27.84	33.56	27.63	36.26	
		1400	32.81	12.75	33.93	16.70	33.65	18.54	33.35	21.65	33.26	25.54	32.83	27.57	32.55	30.64	32.33	33.63	32.03	36.65	31.82	39.71	31.62	42.76	
		1460	35.76	14.47	35.24	17.25	35.04	19.09	34.69	22.25	34.50	25.39	34.09	28.55	33.86	31.74	33.64	34.85	33.34	38.01	33.18	41.68	32.94	44.36	
		1520	36.65	15.96	36.54	17.80	36.43	19.64	36.03	22.94	35.73	26.23	35.35	29.52	35.17	32.83	34.95	36.07	34.65	39.37	34.56	43.65	34.25	45.95	
		1620	38.68	19.39	38.52	21.13	38.36	22.87	38.03	26.43	37.84	29.94	37.43	33.42	37.15	36.96	36.96	40.43	36.65	43.95	36.55	47.45	36.35	50.97	


QS:进风状态风量 (m^3/min)
La:所需动力 (kw)

◎ **NSR型 三角带传动外形尺寸图**

型号	口径	A	B	C	D	E	G	J	H	K	L	M	N	O	Q	R	S	T1	T2	U	V	W	h	n	Φd	n1-Φd1	重量(kg)
NSR-40	40A	180	168	100	15	220	90	50	450	100	40	400	-	380	135	100	90	500	250	16	100	150	80	4	110	4-Φ18	50
NSR-50	50A	185	179	128	15	270	125	80	895	135	100	410	-	450	160	120	105	600	300	19	100	150	100	4	125	4-Φ18	70
NSR-65	65A	205	202	135	15	310	135	80	970	135	100	450	-	500	170	125	115	700	350	19	100	150	100	4	145	4-Φ18	81
NSR-80	80A	220	225	180	15	330	150	80	1130	175	100	500	-	530	210	150	135	900	400	19	100	200	100	4	160	8-Φ18	123
NSR-100	100A	260	265	187	15	440	160	80	1255	175	100	580	-	600	280	150	150	1200	450	19	100	200	100	4	180	8-Φ18	157
NSR-125	125A	295	294	217	15	440	190	100	1515	215	80	700	-	710	255	160	165	1400	500	21	100	200	100	4	210	8-Φ18	235
NSR-150	150A	375	377	261	20	550	210	100	1730	260	155	750	-	860	295	155	180	1600	600	24	120	255	100	4	240	8-Φ22	394
NSR-175	150A	375	600	261	22	656	210	100	1730	260	175	800	-	920	320	170	180	1600	600	24	120	275	100	4	240	8-Φ22	695
NSR-200B	200A	445	412	325	24	602	230	100	2077	330	250	750	-	950	356	200	190	1800	650	29	150	350	100	4	295	8-Φ22	755
NSR-200	200A	525	550	345	25	705	250	120	2210	321	200	1000	500	1080	400	200	190	1800	650	29	150	300	100	6	295	8-Φ22	900
NSR-250B	250A	645	589	380	25	800	330	120	2195	340	200	1000	500	1250	384	250	230	2000	702	30	150	300	100	6	350	12-Φ22	1198
NSR-250	250A	668	590	420	30	890	370	160	2785	460	205	1490	745	1258	550	250	230	2000	700	30	200	305	100	6	350	12-Φ22	1758
NSR-300	300A	756	677	510	30	890	400	160	2975	460	205	1490	745	1433	500	260	245	2000	1120	40	200	305	100	6	400	12-Φ22	2256
NSR-350	350A	950	920	630	32	1376	435	180	3200	560	350	1500	750	1870	688	300	255	2000	1200	45	200	450	100	8	460	16-Φ22	3450

注意：重量中不包括电机消音器重量
大型风机地座随电机功率大小定
用户可根据现场选用出口消音器T1或T2

NSR型 直联传动外形尺寸图

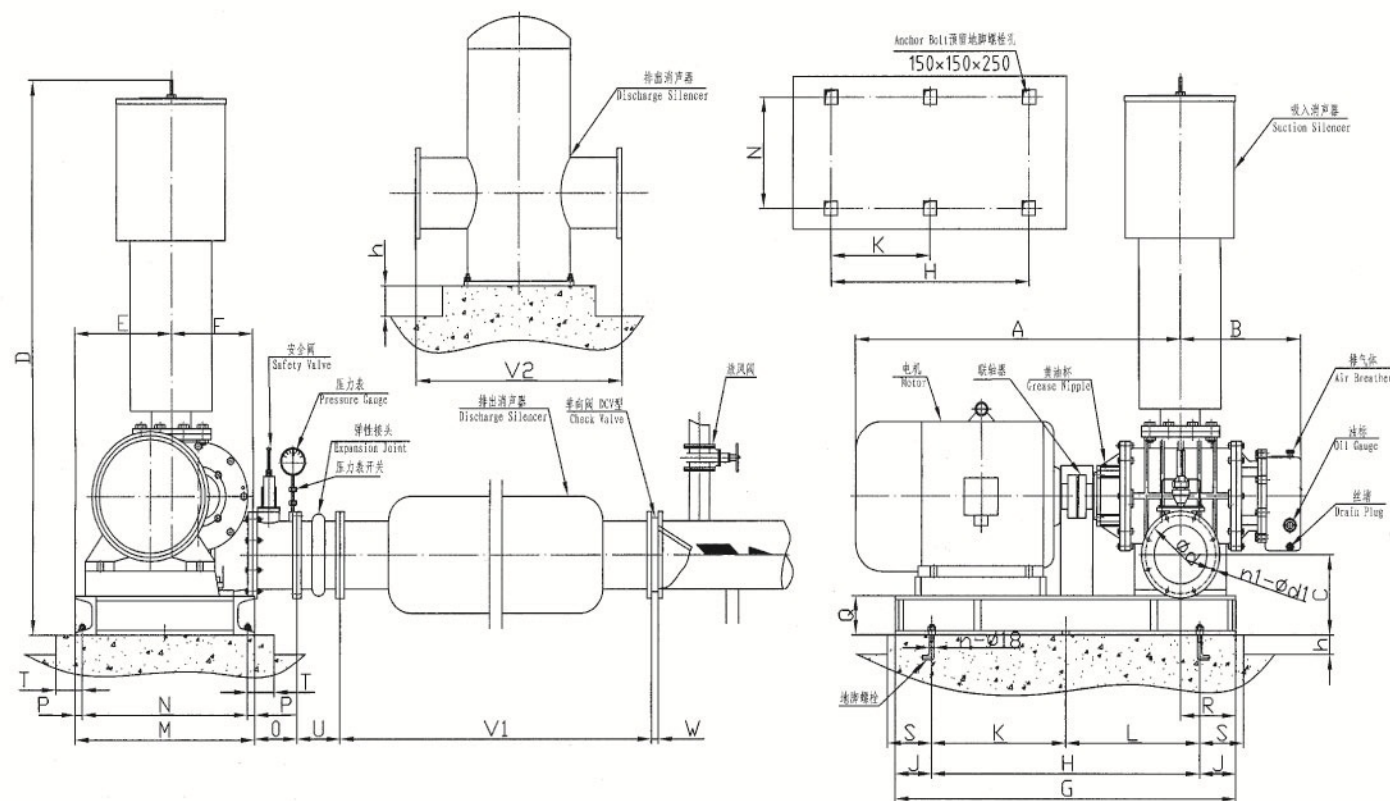

型号	口径	A	B	C	D	E	F	G	H	J	K	L	M	N	O	Q	R	S	T	U	V1	V2	W	h	n	n1- Φd1	重量(kg)
NSR-40	40A	480	168	90	450	122	100	480	380	50	-	-	190	160	100	50	42	150	100	90	500	250	16	80	4	4-Φ18	50
NSR-50	50A	570	179	125	895	152	135	540	420	60	-	-	260	220	120	80	60	150	100	105	600	300	19	100	4	4-Φ18	70
NSR-65	65A	610	202	135	970	192	135	600	440	80	-	-	300	260	125	80	80	150	100	115	700	350	19	100	4	4-Φ18	81
NSR-80	80A	700	225	150	1130	217	175	650	500	75	-	-	370	330	150	80	75	150	100	135	900	400	19	100	4	8-Φ18	123
NSR-100	100A	900	265	160	1255	234	175	850	630	110	-	-	400	360	150	80	110	150	100	150	1200	450	19	100	4	8-Φ18	157
NSR-125	125A	945	294	190	1515	260	215	920	710	105	355	355	430	390	160	100	105	150	100	165	1400	500	21	100	6	8-Φ18	235
NSR-150	150A	1155	377	210	1730	305	260	1150	950	100	475	475	500	455	155	100	165	200	120	180	1600	600	24	100	6	8-Φ22	394
NSR-175	150A	1250	600	210	1730	305	260	1400	1100	150	550	550	540	495	170	100	240	200	120	180	1600	600	24	100	6	8-Φ22	695
NSR-200B	200A	1200	412	230	2077	435	330	1400	1200	100	600	600	650	600	200	100	190	200	150	190	1800	650	29	100	6	8-Φ22	755
NSR-200	200A	1570	550	250	2163	405	321	1600	1300	150	650	650	650	605	200	120	240	200	150	190	1800	650	29	100	6	8-Φ22	900
NSR-250B	250A	1635	589	330	2195	405	355	1700	1300	200	650	650	650	605	250	120	315	300	150	230	2000	700	30	100	6	12-Φ22	1198
NSR-250	250A	1847	590	370	2785	520	460	2100	1800	150	900	900	1020	950	250	160	250	250	200	230	2000	700	30	100	6	12-Φ22	1758
NSR-300	300A	2167	677	400	2975	520	460	2200	2000	100	1000	1000	1020	950	260	160	270	250	200	245	2000	1120	40	100	6	12-Φ22	2256
NSR-350	350A	2630	920	435	3200	601	560	2800	2100	350	700	700	1240	1176	300	180	405	450	200	255	2000	1200	45	100	8	16-Φ22	3450

注意：重量中不包括电机消音器重量

大型风机底座随电机功率大小定

用户可根据现场选用出口消音器V1或V2

NSR-H型 高压罗茨风机性能表

QS:进风状态风量 (m³/min)
La:所需动力 (kw)

2.2kw 3kw 4kw 5.5kw 7.5kw 11kw 15kw 18.5kw 22kw

型式 Type	口径 Bore	转速 rpm	排出压力 (kgf/cm²)																转速 rpm
			0.65		0.70		0.75		0.80		0.85		0.90		0.95		1.0		
			63.7kPa	68.6kPa	73.5kPa	78.4kPa	83.3kPa	88.2kPa	93.1kPa	98.0kPa	Qs	La	Qs	La	Qs	La	Qs	La	
NSR-50H	50A	1100	0.61	2.01	0.56	2.39	0.52	2.75	0.49	3.12	0.46	3.03	0.41	3.35	0.38	3.98	0.35	4.31	1100
		1230	0.78	2.05	0.73	2.24	0.69	2.49	0.65	2.76	0.61	3.37	0.56	3.95	0.50	4.17	0.45	4.65	1230
		1350	0.95	2.23	0.90	2.48	0.86	2.76	0.81	3.06	0.78	3.40	0.69	4.01	0.65	4.32	0.61	4.65	1350
		1430	1.06	2.35	1.01	2.61	0.97	2.90	0.93	3.23	0.90	3.68	0.87	4.05	0.81	4.48	0.72	4.81	1430
		1530	1.22	2.55	1.19	2.83	1.16	3.18	1.13	3.57	1.08	3.88	0.96	4.20	0.90	4.61	0.85	5.10	1530
		1640	1.38	2.75	1.35	3.16	1.32	3.32	1.29	3.89	1.24	4.27	1.18	4.43	1.13	4.80	1.06	5.20	1640
		1730	1.50	2.93	1.46	3.25	1.42	3.54	1.39	3.91	1.31	4.38	1.26	4.70	1.22	5.12	1.14	5.50	1730
		1840	1.65	3.15	1.60	3.35	1.56	3.64	1.51	3.96	1.46	4.43	1.40	4.92	1.35	5.30	1.28	5.70	1840
		1950	1.78	3.42	1.75	3.65	1.71	3.97	1.68	4.31	1.62	4.60	1.57	5.10	1.50	5.53	1.45	5.92	1950
		2120	2.02	3.77	1.98	3.97	1.95	4.21	1.91	4.53	1.83	4.80	1.75	5.30	1.70	5.75	1.63	6.12	2120
		2300	2.31	4.43	2.24	4.35	2.20	4.57	2.17	4.81	2.12	5.20	2.07	5.50	2.03	6.01	1.98	6.32	2300
NSR-65H	65A	1110	0.89	2.52	0.85	2.86	0.80	3.22	0.76	3.58	0.71	3.94	0.66	4.30	0.62	4.66	0.57	5.02	1110
		1240	1.13	2.89	1.08	3.17	1.03	3.49	0.98	3.84	0.93	4.20	0.88	4.56	0.83	4.92	0.78	5.28	1240
		1360	1.39	3.08	1.34	3.42	1.28	3.76	1.23	4.13	1.17	4.40	1.12	4.75	1.06	5.11	1.01	5.47	1360
		1440	1.60	3.35	1.55	3.68	1.51	4.05	1.46	4.45	1.41	4.85	1.35	5.20	1.29	5.56	1.23	5.92	1440
		1530	1.74	3.50	1.69	3.80	1.64	4.14	1.59	4.49	1.53	5.10	1.48	5.40	1.42	5.71	1.37	6.05	1530
		1640	1.98	3.74	1.92	4.06	1.86	4.42	1.81	4.80	1.75	5.25	1.70	5.40	1.65	5.78	1.60	6.10	1640
		1740	2.18	4.13	2.12	4.59	2.06	5.05	2.01	5.55	1.92	5.80	1.84	6.10	1.75	6.35	1.70	6.50	1740
		1820	2.34	4.36	2.27	4.75	2.20	5.15	2.13	5.74	2.10	6.10	2.08	6.40	2.03	6.63	2.00	6.90	1820
		1940	2.57	4.71	2.52	5.03	2.47	5.59	2.42	6.21	2.38	6.43	2.31	6.60	2.27	7.00	2.24	7.30	1940
		2130	2.96	5.22	2.89	5.54	2.84	5.86	2.78	6.30	2.70	6.62	2.65	6.91	2.60	7.20	2.53	7.55	2130
		2300	3.09	5.72	3.06	6.14	3.01	6.58	2.95	6.89	2.88	7.10	2.83	7.33	2.77	7.51	2.70	7.82	2300
NSR-80H	80A	1140	2.27	4.09	2.20	4.44	2.14	4.83	2.07	5.25	2.01	5.61	1.96	5.97	1.89	6.33	1.82	6.69	1140
		1230	2.52	4.49	2.45	4.88	2.37	5.30	2.30	5.76	2.25	6.10	2.19	6.45	2.12	6.81	2.06	7.17	1230
		1300	2.77	4.82	2.69	5.23	2.61	5.69	2.53	6.18	2.48	6.40	2.40	6.71	2.34	7.07	2.28	7.43	1300
		1360	2.95	5.08	2.86	5.52	2.77	5.99	2.69	6.52	2.62	6.80	2.57	7.21	2.49	7.53	2.42	7.89	1360
		1440	3.07	5.67	3.00	6.06	2.92	6.44	2.84	6.89	2.78	7.03	2.65	7.38	2.60	7.90	2.55	8.10	1440
		1560	3.44	6.17	3.37	6.57	3.30	6.97	3.21	7.21	3.18	7.40	3.15	7.70	3.10	8.12	3.07	8.35	1560
		1650	3.73	6.55	3.65	7.02	3.59	7.45	3.48	7.73	3.40	8.00	3.32	8.20	3.27	8.40	3.21	8.70	1650
		1730	4.01	6.94	3.93	7.35	3.85	7.84	3.79	8.25	3.70	8.40	3.65	8.71	3.61	8.98	3.52	9.10	1730
		1820	4.29	7.27	4.22	7.74	4.15	8.25	4.08	8.72	4.00	9.01	3.95	9.15	3.89	9.28	3.80	9.55	1820
		1900	4.55	7.65	4.49	8.14	4.42	8.63	4.35	9.13	4.27	9.31	4.20	9.58	4.13	9.88	4.07	10.1	1900
		2100	5.26	8.45	5.18	9.04	5.12	9.54	5.05	9.90	5.00	10.20	4.91	10.51	4.87	10.90	4.80	11.2	2100
2300	5.52	8.73	5.50	9.35	5.47	9.97	5.41	11.04	5.35	11.66	5.28	12.28	5.21	12.90	5.14	13.52	2300		
NSR-100H	100A	1060	3.17	6.36	3.09	6.91	3.01	7.51	2.94	8.17	2.87	8.53	2.79	8.89	2.72	9.25	2.65	9.61	1060
		1140	3.65	6.90	3.58	7.51	3.65	8.15	3.72	8.66	3.65	8.90	3.60	9.10	3.54	9.50	3.48	9.86	1140
		1220	4.06	7.52	3.98	8.18	3.90	8.88	3.83	9.65	3.75	10.10	3.68	10.40	3.61	10.76	3.54	11.11	1220
		1310	4.43	8.15	4.35	8.75	4.26	9.62	4.18	10.56	4.10	10.82	4.03	11.50	3.90	11.71	3.82	12.10	1310
		1460	5.28	9.23	5.19	9.85	5.10	10.44	4.99	10.91	4.78	11.32	4.61	11.85	4.48	12.30	4.30	12.75	1460
		1540	5.70	9.75	5.64	10.46	5.55	11.12	5.43	10.96	5.21	11.98	5.00	12.21	4.83	12.80	4.68	13.20	1540
		1680	6.44	10.77	6.35	11.53	6.25	12.21	6.16	12.63	6.00	12.90	5.85	13.20	5.71	13.67	5.49	14.10	1680
		1780	6.95	11.52	6.87	12.34	6.83	13.07	6.75	13.44	6.55	13.92	6.38	14.10	6.10	14.52	5.91	14.88	1780
		1880	7.55	12.25	7.45	13.05	7.33	13.86	7.24	14.26	7.09	14.58	6.90	14.93	6.73	15.20	6.51	15.69	1880
		1980	8.06	13.05	7.92	13.87	7.85	14.72	7.75	15.27	7.58	15.61	7.40	16.02	7.21	16.60	7.03	17.20	1980
		2100	8.65	13.85	8.55	14.70	8.49	15.62	8.40	16.02	8.25	16.62	8.07	17.13	7.93	17.66	7.71	18.20	2100
2200	9.17	14.57	9.14	15.46	9.04	16.42	8.92	16.95	8.72	17.40	8.61	17.98	8.47	18.33	8.21	18.98	2200		

NSR-H型 高压罗茨风机性能表


QS:进风状态风量 (m³/min)
La:所需动力 (kw)

11kw 15kw 18.5kw 22kw 30kw 37kw 45kw 55kw 75kw 90kw
110kw 132kw 160kw 185kw 200kw 225kw 250kw 280kw 315kw 355kw

型式 Type	口径 Bore	转速 rpm	排出压力 (kgf/cm ²)																转速 rpm
			0.65		0.70		0.75		0.80		0.85		0.90		0.95		1.0		
			63.7kPa	68.6kPa	73.5kPa	78.4kPa	83.3kPa	88.2kPa	93.1kPa	98.0kPa									
			Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	
NSR-125H	125A	980	5.24	8.92	5.14	9.81	5.04	10.89	4.93	12.10	4.86	13.2	4.78	14.1	4.71	15.3	4.64	16.4	980
		1050	5.54	9.71	5.43	10.78	5.32	11.98	5.21	13.01	5.11	14.08	5.01	15.11	4.92	16.01	4.80	17.10	1050
		1200	6.83	11.05	6.74	11.82	6.66	12.55	6.54	13.33	6.43	14.61	6.32	15.58	6.23	16.57	6.15	17.90	1200
		1310	7.55	12.22	7.45	13.13	7.39	13.92	7.34	14.83	7.25	15.85	7.17	16.86	7.09	17.87	6.99	18.80	1310
		1390	8.14	13.14	8.06	14.04	7.92	14.91	7.85	15.82	7.61	16.20	7.52	17.21	7.43	18.23	7.34	19.25	1390
		1460	8.50	13.73	8.45	14.67	8.33	15.62	8.24	16.55	8.08	17.10	7.90	17.72	7.73	18.20	7.53	19.8	1460
		1530	9.05	14.63	8.95	15.62	8.87	16.63	8.82	17.62	8.61	18.01	8.48	18.71	8.21	19.40	8.00	20.10	1530
		1630	9.75	15.65	9.65	16.73	9.55	17.82	9.45	18.95	9.31	19.60	9.15	20.30	8.93	20.98	8.80	21.60	1630
		1750	10.55	16.94	10.45	18.06	10.35	19.14	10.25	20.25	10.05	21.0	9.87	21.80	9.80	22.35	9.62	23.10	1750
		1850	11.23	18.05	11.13	19.24	11.04	20.37	10.94	21.45	10.78	22.10	10.61	22.98	10.45	23.70	10.27	24.20	1850
		2000	12.23	20.02	12.12	21.31	12.05	22.63	11.93	23.92	11.71	24.50	11.58	25.10	11.37	25.90	11.10	26.80	2000
NSR-150H	150A	810	10.26	17.16	10.16	18.86	10.06	20.73	9.96	22.78	9.86	24.38	9.75	25.98	9.64	27.28	9.53	28.58	810
		860	11.16	17.77	11.03	18.97	10.85	20.87	10.73	24.37	10.62	25.67	10.51	26.97	10.40	28.27	10.29	29.57	860
		970	13.12	21.45	12.95	22.93	12.86	24.34	12.73	25.82	12.51	26.50	12.39	29.01	12.25	30.36	12.12	33.71	970
		1110	15.55	25.07	15.46	26.74	15.33	28.45	15.15	30.07	15.00	32.60	14.78	35.00	14.65	37.21	14.5	39.35	1110
		1180	16.86	26.34	16.73	28.22	16.55	30.15	16.43	31.84	16.27	33.20	16.10	36.30	15.89	40.10	15.71	44.23	1180
		1240	17.92	27.73	17.75	29.55	17.66	31.43	17.53	33.17	17.21	36.21	17.10	39.38	16.8	44.45	16.63	47.78	1240
		1400	20.76	33.34	20.63	35.85	20.45	37.97	20.33	40.13	20.11	43.0	19.87	46.10	19.63	49.80	19.48	52.0	1400
		1470	21.92	34.57	21.82	36.92	21.69	39.12	21.52	41.33	21.30	44.8	21.11	47.10	20.90	50.9	20.71	54.0	1470
		1620	24.12	40.07	24.04	43.32	23.85	45.83	23.73	48.25	23.50	51.10	23.31	54.0	23.13	57.8	22.90	60.1	1620
		1730	25.76	44.85	25.64	47.63	25.45	50.27	25.32	52.95	25.14	55.95	25.00	58.10	24.80	61.0	24.61	65.0	1730
		1900	28.35	47.83	28.15	50.54	27.97	53.35	27.92	56.43	27.71	59.23	27.58	62.01	27.39	65.30	27.11	69.01	1900
NSR-200H	200A	810	27.26	47.34	26.93	45.35	26.62	48.52	26.33	51.73	26.12	55.0	25.90	58.2	25.59	61.4	25.28	64.61	810
		900	31.45	47.64	31.14	51.23	30.85	54.52	30.54	57.85	30.21	60.8	29.90	64.01	28.89	67.21	28.58	70.41	900
		980	35.05	53.03	34.72	56.75	34.38	60.55	34.05	64.23	33.80	66.80	33.62	69.10	33.27	72.3	32.92	75.51	980
		1070	39.35	58.83	39.13	63.73	38.92	67.37	38.75	71.44	38.58	74.01	38.37	77.20	38.11	80.50	37.90	84.20	1070
		1150	43.03	64.33	42.74	68.63	42.45	73.34	42.25	77.66	42.03	80.10	41.81	84.20	41.63	87.5	41.45	90.7	1150
		1230	46.41	69.32	46.21	74.22	46.02	78.81	45.83	83.52	45.60	86.10	45.42	89.10	45.20	92.3	45.0	96.0	1230
		1310	49.72	74.81	49.53	79.71	49.32	84.72	49.11	89.76	48.90	92.10	48.68	95.3	48.41	99.2	48.25	105.1	1310
		1390	53.03	79.65	52.82	84.91	52.71	90.24	52.52	95.55	52.35	98.7	52.10	103.2	51.90	107.2	51.72	112.0	1390
		1480	56.92	85.61	56.82	91.32	56.71	96.72	56.53	102.4	56.21	106.3	56.10	110.0	55.75	115.0	55.4	120.0	1480
		NSR-250H	250A	990	61.2	83.2	61.0	88.9	59.9	93.6	59.8	99.7	59.2	112.1	58.8	120.0	58.3	129.6	58.0
1170	71			96.1	69.6	101.5	69.4	108.5	69.0	115.1	68.6	126.0	68.2	134.4	67.7	140.1	67.1	152.0	1170
1250	76.4			103.5	76.0	110.8	75.6	118.2	75.1	125.2	74.5	142.0	74.1	149.0	73.4	155.0	73.0	165.0	1250
1360	86.3			112.5	86.0	125.5	85.7	133.9	85.4	142.4	85.1	154.0	84.7	165.0	84.3	177.0	84.0	183.0	1360
1480	93.7			126.9	93.4	136.2	93.2	145.6	92.6	154.3	92.2	170.1	91.8	184.0	91.5	192.0	91.2	205.0	1480
NSR-300H	300A	990	86.9	114.7	86.7	123.6	86.4	127.1	86.1	135.1	85.5	150.1	85.0	165.0	84.6	172.3	83.8	183.0	990
		1170	102.5	135.3	102.3	145.3	102.1	150.1	101.8	159.8	101.5	170.5	101.1	182.1	100.8	200.1	100.5	227.0	1170
		1250	110.4	145.7	110.2	155.8	110	161.7	109.8	172.4	109.3	187.1	108.9	203.1	108.6	220.1	108.3	234.0	1250
		1360	123.2	162.6	123.0	176.6	122.7	180.4	122.5	192.3	122.2	206.1	122.0	217.5	121.7	232.0	121.5	256.0	1360
		1480	134.1	177.8	134.0	190.6	133.8	196.7	133.7	209.9	133.5	213.0	133.2	235.1	132.8	250.1	132.5	270.1	1480
NSR-350H	350A	650	104.1	151	103.4	162	102.4	174	101.5	185	100.6	197	99.7	209	98.8	221	97.9	233	650
		730	120.9	170	119.9	182	118.9	195	118	207	117.1	220	116.2	233	115.3	246	114.4	259	730
		800	135.3	186	134.3	200	133.3	214	132.4	227	131.5	240	130.6	253	129.7	266	128.8	279	800
		880	151.8	205	150.8	220	149.8	235	148.9	250	148	265	147.1	280	146.2	295	145.3	310	880
		980	172.4	228	171.4	245	170.4	262	169.5	278	168.6	294	167.7	310	166.8	326	165.9	342	980


注: 1、所选电机一般为4级电机, 另视转速调整级数。 2、带“★”号的也可用于直联传动。
3、风机油箱水冷却时用水量NSR125 (DN) 以下为5~8L/min NSR150 (DN) 以上为8~13L/min, 冷却水进时温度不高于25℃, 进口压力为196kpa。

NSR-H型 三角带传动外形尺寸图

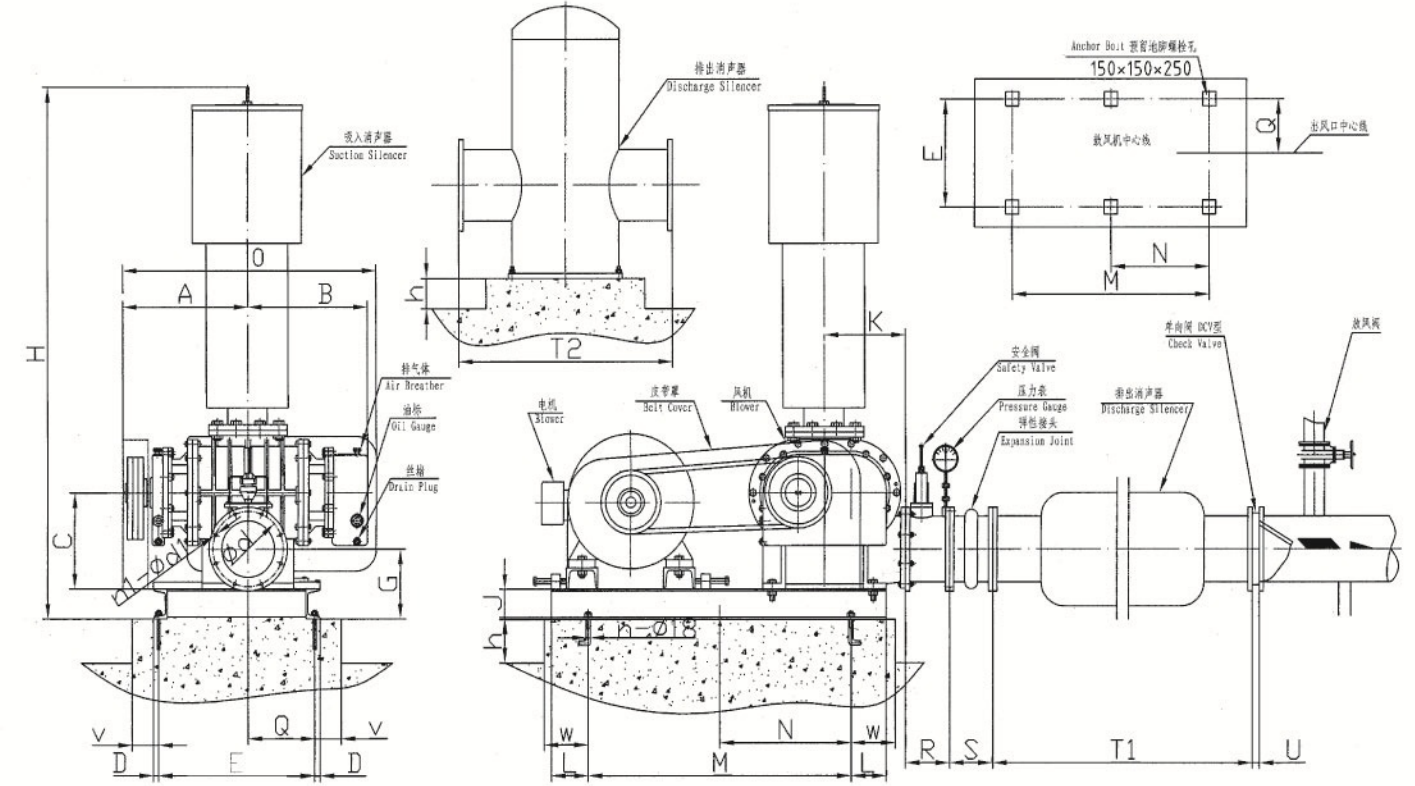

型号	口径	A	B	C	D	E	G	H	J	K	L	M	N	O	Q	R	S	T1	T2	U	V	W	h	n	Φd	n1-Φd1	重量(kg)
NSR-50	50A	240	195	143	15	270	125	895	80	140	100	410	-	500	120	120	105	600	300	19	100	150	100	4	125	4-Φ18	80
NSR-65	65A	264	219	150	15	310	135	970	80	140	100	450	-	550	130	125	115	700	350	19	100	150	100	4	145	4-Φ18	91
NSR-80	80A	290	255	200	15	330	150	1130	80	200	100	500	-	590	150	150	135	900	400	19	100	150	100	4	160	8-Φ18	153
NSR-100	100A	330	295	207	15	440	160	1255	80	200	100	580	-	660	220	150	150	1200	450	19	100	150	100	4	180	8-Φ18	207
NSR-125	125A	340	306	237	15	440	190	1515	100	230	110	700	-	780	180	160	165	1400	500	21	100	150	100	4	210	8-Φ18	295
NSR-150	150A	442	412	300	20	550	210	1730	100	270	155	750	-	920	210	155	180	1600	600	24	120	255	100	4	240	8-Φ22	465
NSR-200	200A	595	510	385	25	705	250	2210	120	350	200	1000	500	1180	300	200	190	1800	650	29	150	300	100	6	295	8-Φ22	1000
NSR-250	250A	734	586	420	30	890	370	2785	160	460	205	1490	745	1380	440	250	230	2000	700	30	200	305	100	6	350	12-Φ22	1758
NSR-300	300A	819	683	510	30	890	400	2975	160	460	205	1490	745	1533	490	260	245	2000	1120	40	200	305	100	6	400	12-Φ22	2300
NSR-350	350A	950	920	630	32	1376	435	3200	180	560	350	1500	750	1870	688	300	255	2000	1200	45	200	450	100	8	460	16-Φ22	3500

NSR-H型 直联式外形尺寸图

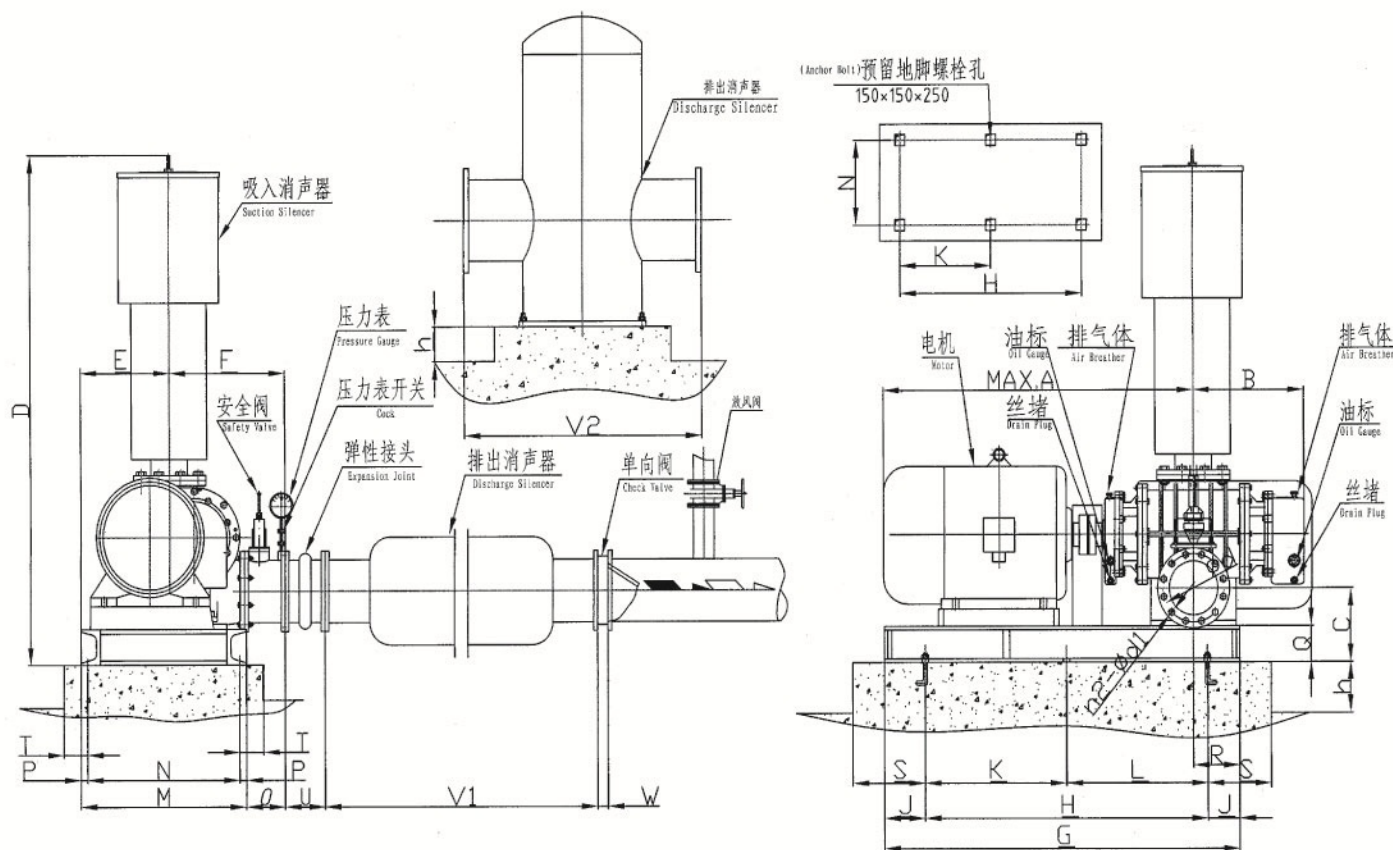

型号	口径	A	B	C	D	E	F	G	H	J	K	L	M	N	O	Q	R	S	T	U	V1	V2	W	h	n	Φd	n1-Φd1	重量(kg)
NSR-50	50A	570	179	125	895	152	140	540	420	60	-	-	260	220	120	80	60	150	100	105	600	300	19	100	4	125	4-Φ18	80
NSR-65	65A	610	202	135	970	192	140	600	440	80	-	-	300	260	125	80	80	150	100	115	700	350	19	100	4	145	4-Φ18	91
NSR-80	80A	720	225	150	1130	217	200	650	500	75	-	-	370	330	150	80	75	150	100	135	900	400	19	100	4	160	8-Φ18	153
NSR-100	100A	920	265	160	1255	234	200	850	630	110	-	-	400	360	150	80	110	150	100	150	1200	450	19	100	4	180	8-Φ18	207
NSR-125	125A	965	294	190	1515	260	230	920	710	105	355	355	430	390	160	100	105	150	100	165	1400	500	21	100	6	210	8-Φ18	295
NSR-150	150A	1185	377	210	1730	305	270	1250	950	150	475	475	500	455	155	100	165	200	120	180	1600	600	24	100	6	240	8-Φ22	465
NSR-200	200A	1600	550	250	2210	405	350	1600	1300	150	650	650	650	605	200	120	240	200	150	190	1800	650	29	100	6	295	8-Φ22	1000
NSR-250	250A	1867	596	370	2785	520	460	2100	1800	150	900	900	1020	950	250	160	250	250	200	230	2000	700	30	100	6	350	12-Φ22	1758
NSR-300	300A	2197	683	400	2975	520	460	2200	2000	100	1000	1000	1020	950	260	160	270	250	200	245	2000	1120	40	100	6	400	12-Φ22	2300
NSR-350	350A	2630	920	435	3200	601	560	2800	2100	350	700	700	1240	1176	300	180	405	450	200	255	2000	1200	45	100	8	460	16-Φ22	3500

注意：重量中不包括电机消音器重量

大型风机底座随电机功率大小定

用户可根据现场选用出口消音器V1或V2

NSR-V型 真空性能表

QS: 各真空度下的风量 (m³/min)

La: 所需动力 (kw)

0.75kw 1.1kw 1.5kw 2.2kw 3kw 4kw 5.5kw 7.5kw 11kw 15kw


型式 Type	口径 Bore	真空度 Vacuum	-100mmHg		-150mmHg		-200mmHg		-250mmHg		-300mmHg		-330mmHg		真空度 Vacuum
			-1360mmAq		-2040mmAq		-2720mmAq		-3400mmAq		-4080mmAq		-4488mmAq		
			转速rpm	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	
NSR— 50VH	吸入口径 5K—40A 吐出口径 1.0MPa— 50A	1100	1.12	0.36	1.03	0.55	0.94	0.74	0.86	0.93					1100
		1230	1.29	0.47	1.20	0.67	1.10	0.88	1.02	1.08					1230
		1350	1.45	0.58	1.36	0.80	1.26	1.02	1.16	1.24					1350
		1470	1.62	0.74	1.54	0.96	1.45	1.18	1.35	1.40	1.25	1.62	1.21	1.75	1470
		1560	1.76	0.86	1.69	1.09	1.60	1.31	1.50	1.54	1.37	1.76	1.31	1.89	1560
		1660	1.88	0.93	1.81	1.17	1.71	1.41	1.61	1.66	1.48	1.90	1.42	2.04	1660
		1750	1.99	0.99	1.92	1.27	1.82	1.50	1.71	1.76	1.58	2.02	1.52	2.17	1750
		1850	2.12	1.13	2.05	1.39	1.95	1.65	1.84	1.91	1.71	2.17	1.64	2.32	1850
		1960	2.27	1.28	2.20	1.55	2.10	1.81	1.99	2.08	1.90	2.34	1.85	2.50	1960
		2120	2.46	1.56	2.38	1.84	2.27	2.21	2.15	2.40	2.02	2.67	1.95	2.83	2120
2300	2.67	1.79	2.59	2.10	2.48	2.50	2.37	2.70	2.27	3.05	2.23	3.21	2300		
NSR— 65VH	吸入口径 5K—50A 吐出口径 1.0MPa— 65A	1100	1.57	0.75	1.43	0.98	1.30	1.21	1.16	1.45					1100
		1240	1.83	0.84	1.69	1.09	1.54	1.35	1.40	1.61					1240
		1360	2.08	0.95	1.93	1.24	1.78	1.52	1.64	1.81					1360
		1460	2.27	1.05	2.13	1.35	1.99	1.65	1.84	1.96	1.70	2.26	1.61	2.44	1460
		1550	2.47	1.13	2.32	1.45	2.17	1.77	2.03	2.09	1.88	2.41	1.80	2.60	1550
		1670	2.70	1.24	2.56	1.58	2.42	1.93	2.27	2.28	2.13	2.62	2.05	2.83	1670
		1770	2.90	1.32	2.76	1.69	2.62	2.06	2.49	2.43	2.35	2.79	2.27	3.03	1770
		1860	3.08	1.44	2.94	1.82	2.80	2.20	2.65	2.59	2.51	2.98	2.44	3.20	1860
		1980	3.33	1.60	3.18	2.00	3.03	2.41	2.89	2.81	2.74	3.23	2.72	3.47	1980
		2150	3.57	1.84	3.43	2.28	3.30	2.72	3.16	3.16	3.02	3.60	2.92	3.86	2150
2300	3.80	2.10	3.65	2.54	3.49	3.05	3.34	3.51	3.18	3.95	3.09	4.21	2300		
NSR— 80VH	吸入口径 5K—65A 吐出口径 1.0MPa— 80A	1130	2.92	1.01	2.79	1.46	2.65	1.90	2.50	2.35					1130
		1240	3.29	1.17	3.15	1.66	3.00	2.14	2.85	2.63	2.69	3.11	2.62	3.40	1240
		1300	3.49	1.30	3.35	1.80	3.20	2.30	3.05	2.80	2.89	3.30	2.82	3.60	1300
		1370	3.73	1.44	3.59	1.96	3.44	2.49	3.29	3.01	3.13	3.53	3.06	3.84	1370
		1470	4.03	1.60	3.89	2.16	3.74	2.73	3.59	3.30	3.43	3.86	3.35	4.20	1470
		1570	4.35	1.82	4.21	2.40	4.07	2.99	3.92	3.57	3.77	4.16	3.66	4.51	1570
		1660	4.64	2.01	4.51	2.62	4.37	3.24	4.22	3.85	4.06	4.46	3.96	4.82	1660
		1750	4.95	2.23	4.81	2.85	4.67	3.48	4.53	4.11	4.38	4.73	4.27	5.10	1750
		1840	5.23	2.42	5.10	3.09	4.96	3.75	4.81	4.42	4.65	5.09	4.55	5.48	1840
		1930	5.53	2.64	5.40	3.33	5.26	4.02	5.11	4.72	4.95	5.41	4.85	5.82	1930
		2100	6.09	2.88	5.96	3.65	5.82	4.42	5.65	5.19	5.49	5.96	5.41	6.42	2100
		2300	6.75	3.27	6.62	4.12	6.48	4.96	6.31	5.80	6.15	6.65	6.07	7.14	2300
NSR— 100VH	吸入口径 5K—80A 吐出口径 1.0MPa— 100A	1070	4.35	1.56	4.06	2.24	3.80	2.92	3.57	3.60					1070
		1160	4.83	1.80	4.56	2.53	4.29	3.27	4.03	4.01	3.78	4.72	3.63	5.15	1160
		1240	5.27	1.97	4.99	2.74	4.72	3.52	4.46	4.29	4.20	5.07	4.07	5.52	1240
		1320	5.80	2.09	5.54	2.94	5.27	3.79	5.01	4.64	4.74	5.49	4.58	6.00	1320
		1480	6.51	2.27	6.28	3.19	6.05	4.14	5.82	5.05	5.60	5.97	5.47	6.51	1480
		1580	6.99	2.45	6.77	3.43	6.55	4.44	6.33	5.44	6.10	6.40	5.96	6.98	1580
		1700	7.57	2.66	7.37	3.72	7.16	4.79	6.95	5.68	6.73	6.92	6.60	7.56	1700
		1790	8.00	2.87	7.81	3.95	7.60	5.07	7.38	6.19	7.15	7.27	7.01	7.93	1790
		1890	8.47	3.03	8.29	4.21	8.09	5.39	7.88	6.56	7.66	7.74	7.53	8.45	1890
		2010	9.08	3.23	8.92	4.48	8.75	5.74	8.57	7.00	8.38	8.26	8.27	9.03	2010
		2200	10.07	3.56	9.91	5.00	9.63	6.37	9.33	7.79	9.06	9.13	8.89	9.95	2200

NSR-V型 真空性能表




5.5kw 7.5kw 11kw 15kw 18.5kw 22kw 30kw 37kw 45kw 55kw 75kw
90kw 110kw 132kw

型式 Type	口径 Bore	真空度 转速rpm	-100mmHg -1360mmAq		-150mmHg -2040mmAq		-200mmHg -2720mmAq		-250mmHg -3400mmAq		-300mmHg -4080mmAq		-330mmHg -4488mmAq		真空度 转速rpm
			Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	Qs	La	
NSR-125V	吸入口径 5K-100A 吐出口径 1.0MPa-125A	980	6.24	2.27	5.97	3.17	5.70	4.07	5.42	4.97	5.14	5.86	5.01	6.40	980
		1050	6.75	2.60	6.48	3.53	6.21	4.47	5.94	5.41	5.66	6.35	5.61	6.89	1050
		1200	7.77	3.26	7.51	4.31	7.25	5.37	6.98	6.42	6.69	7.47	6.58	8.08	1200
		1310	8.57	3.71	8.36	4.87	8.13	6.02	7.88	7.18	7.61	8.33	7.44	9.00	1310
		1410	9.27	4.05	9.05	5.29	8.82	6.53	8.57	7.77	8.30	9.00	8.15	9.73	1410
		1470	9.70	4.37	9.48	5.66	9.25	6.95	9.02	8.23	8.78	9.50	8.50	10.28	1470
		1550	10.37	4.62	10.10	5.98	9.82	7.34	9.85	8.70	9.33	10.10	9.13	10.92	1550
		1650	11.00	5.18	10.70	6.64	10.50	8.11	10.30	9.58	10.10	11.10	9.64	11.93	1650
		1770	11.80	5.70	11.50	7.23	11.30	8.75	11.10	10.30	10.90	11.80	10.38	12.71	1770
		1880	12.50	6.25	12.30	7.86	12.00	9.46	11.80	11.10	11.60	12.70	11.16	13.66	1880
NSR-150V	吸入口径 5K-125A 吐出口径 1.0MPa-150A	2000	13.37	6.84	13.17	8.55	12.85	10.27	12.51	11.97	12.21	13.69	12.04	14.72	2000
		810	12.60	3.51	12.20	4.83	11.80	6.72	11.40	8.61	11.00	10.50	10.75	11.61	810
		870	13.80	4.12	13.30	6.00	12.80	7.80	12.30	9.77	11.80	11.70	11.50	12.74	870
		990	15.60	4.46	15.10	6.58	14.60	8.70	14.20	10.80	13.80	12.90	13.60	14.17	990
		1120	17.70	6.61	17.30	8.94	16.80	11.30	16.30	13.60	15.80	15.90	15.55	17.30	1120
		1200	19.20	7.57	18.70	9.93	18.20	12.30	17.80	14.70	17.30	17.00	16.93	18.48	1200
		1270	20.30	8.40	19.90	10.80	19.50	13.20	19.10	15.60	18.70	18.00	18.09	19.42	1270
		1410	22.50	10.50	22.10	13.20	21.70	15.90	21.30	18.60	20.90	21.30	20.69	22.90	1410
		1540	24.70	12.50	24.20	15.40	23.70	18.30	23.20	21.20	22.70	24.00	22.25	25.70	1540
		1670	26.50	14.30	26.00	17.40	25.50	20.50	25.00	23.50	24.50	26.60	24.22	28.41	1670
NSR-175V	吸入口径 5K-150A 吐出口径 1.0MPa-200A	1780	27.80	15.90	27.30	19.20	26.80	22.50	26.30	25.80	25.70	29.10	25.51	31.07	1780
		1900	29.25	17.77	28.81	21.09	27.91	24.83	27.34	28.45	26.72	32.26	26.47	33.93	1900
		970	21.19	8.09	20.43	11.19	19.57	13.69	18.86	15.85	18.01	18.15	17.21	19.71	970
		1110	24.84	10.07	23.90	13.81	23.10	16.65	22.55	19.14	21.51	21.70	19.98	23.10	1110
		1180	26.63	11.46	25.75	14.56	24.86	17.75	24.28	20.53	23.42	23.42	21.90	25.62	1180
		1240	28.18	11.96	27.24	15.70	26.55	19.01	25.88	21.74	24.96	25.15	22.50	28.91	1240
		1400	32.18	14.20	31.32	18.48	30.57	22.64	29.95	25.53	29.08	29.27	27.80	34.21	1400
		1520	35.15	16.11	34.25	20.99	33.65	24.85	32.91	28.58	32.03	32.33	30.61	37.38	1520
		1620	37.48	18.02	36.62	23.57	35.79	27.67	35.13	31.53	34.23	35.84	32.13	40.17	1620
		1730	40.00	20.22	39.12	26.00	38.32	30.85	37.66	35.35	36.67	39.61	34.17	45.01	1730
NSR-200V	吸入口径 5K-150A 吐出口径 1.0MPa-200A	810	31.07	10.38	29.92	14.89	29.01	18.96	28.16	23.20	27.08	27.43	25.72	29.85	810
		900	34.92	12.49	33.98	17.37	32.17	22.01	32.28	26.82	31.16	31.49	29.76	34.30	900
		980	38.39	14.40	37.24	19.66	36.85	24.80	35.97	30.06	35.10	35.14	34.60	38.19	980
		1070	42.37	16.59	41.02	21.61	40.91	27.72	40.09	33.57	38.86	39.32	36.37	42.81	1070
		1150	45.90	18.61	45.25	24.06	44.65	30.15	43.72	36.35	42.50	42.76	40.96	46.16	1150
		1230	49.01	20.58	48.38	26.74	47.79	33.47	47.02	40.25	45.87	46.83	43.78	50.74	1230
		1310	52.26	23.03	51.61	29.61	50.95	36.65	50.33	43.84	49.24	50.97	46.60	55.13	1310
		1390	55.22	25.15	54.65	32.33	54.11	39.86	53.61	47.40	52.64	55.03	49.44	59.57	1390
NSR-250V	吸入口径 5K-200A 吐出口径 1.0MPa-250A	1480	58.65	27.52	58.17	34.85	57.64	43.13	57.05	51.20	56.46	59.06	52.61	63.76	1480
		990	63.3	28.5	63.1	30.8	62.9	35.8	62.7	41.8	62.2	55.3	62.0	62.1	990
		1170	74.5	29.2	74.3	35.9	74	42.2	73.6	49.1	72.7	64.6	72.3	72.5	1170
		1250	79.9	36.2	79.6	38.3	79.2	45.2	78.8	52.6	78.2	69.5	77.9	78.1	1250
		1360	89.1	37.2	88.7	40.5	88.5	50.4	88.3	58.9	87.8	78.1	87.5	87.6	1360
NSR-300V	吸入口径 5K-250A 吐出口径 1.0MPa-300A	1480	97.01	38.2	96.5	44.1	96.2	54.8	96.1	64.1	95.5	84.9	95.2	95.8	1480
		990	89.6	29.2	88.9	32	88.7	46.1	88.5	55.3	88.1	73.4	87.9	73.2	990
		1170	106.5	35.5	105	43.7	104.7	54.4	104	65	103.8	86.4	103.5	90.6	1170
		1250	113.5	37.4	112.2	46.7	112	58.2	111.8	69.8	111.4	92.8	111.2	97.8	1250
		1360	126	43.0	125	52.1	124.8	64.5	124.6	77.5	124.2	103.4	124.0	109.1	1360
		1480	137	45.5	135.9	56.2	135.8	70.6	135.6	84.3	135.1	112.5	134.9	118.7	1480

NSR-MJ型 密集机组外形尺寸图

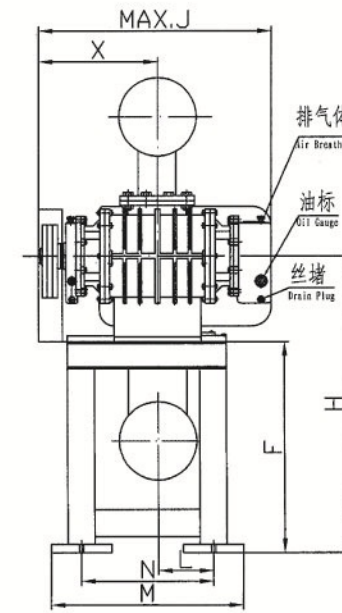

地脚螺栓预孔
Anchor Bolt Location

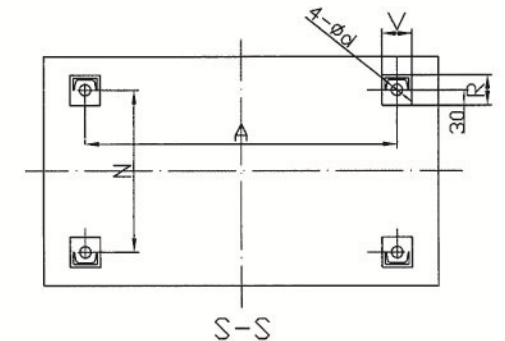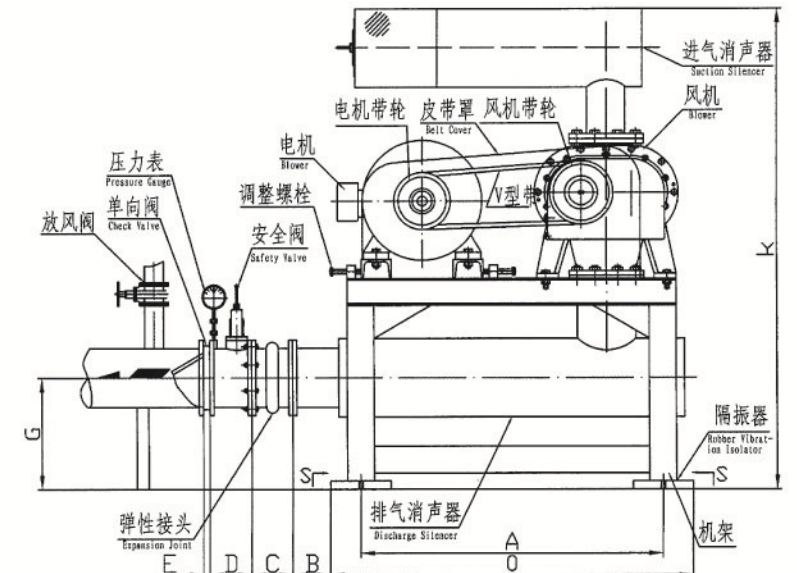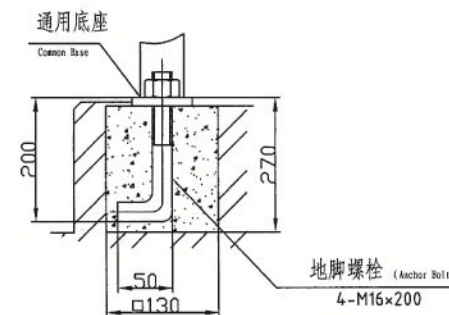

型号	口径	A	B	C	D	E	F	G	H	J	K	L	M	N	O	X	R	V	4-Φd	重量 (kg)
NSR-50	50A	380	90	105	120	19	450	240	578	450	970	125	320	200	560	185	90	100	18	100
NSR-65	65A	450	100	115	130	19	480	240	615	500	1050	140	360	240	650	205	90	100	18	110
NSR-80	80A	500	110	135	140	19	500	250	680	530	1150	150	380	260	700	220	90	100	18	150
NSR-100	100A	540	110	150	140	19	520	265	707	600	1200	200	490	370	780	260	90	100	18	180
NSR-125	125A	600	120	165	150	21	560	280	777	710	1380	215	490	370	860	295	90	120	18	280
NSR-150	150A	760	130	180	150	24	620	340	881	860	1565	250	610	470	1060	375	100	120	18	430
NSR-175	150A	850	130	180	150	24	620	340	881	950	1565	320	720	580	1150	470	100	120	18	680
NSR-200B	200A	950	150	190	160	29	750	380	1095	980	1870	325	670	530	1250	425	100	120	18	740
NSR-200	200A	1050	150	190	160	29	750	380	1095	1080	1920	304	775	640	1400	525	100	140	18	980
NSR-250B	250A	1050	160	230	250	30	900	400	1280	1300	2250	357	870	750	1400	641	100	140	18	1350
NSR-250	250A	1340	160	230	250	30	900	400	1320	1258	2300	460	970	800	1900	608	140	180	26	1858
NSR-300	300A	1340	160	245	250	40	950	420	1460	1433	2480	375	970	800	1900	756	140	180	26	2356

注意：重量中不包括电机消音器重量